

SNOW FENCE
STA 2+842.7 TO STA 2+864.6 LT

PERMANENT SEDIMENT TRAP
STA 3+098 TO STA 3+100 LT



EROSION MATTING
STA 2+890.000 TO STA 2+910.000 RT
STA 2+950.000 TO STA 3+029.000 RT
STA 2+950.000 TO STA 2+970.000 LT
STA 2+990.000 TO STA 3+029.000 LT
STA 3+050.000 TO STA 3+090.000 RT

SILT FENCE
STA 2+833.3 TO STA 2+865.6 LT
STA 2+833.3 TO STA 2+865.6 LT
STA 2+834.6 TO STA 2+863.9 RT
STA 2+834.6 TO STA 2+863.9 RT

ROCK CHECK DAM
STA 2+833 RT
STA 2+833 LT
STA 2+864 LT
STA 2+866 RT
STA 2+952 RT
STA 3+005 RT
STA 3+017 RT
STA 3+030 RT
STA 3+063 RT
STA 3+076 RT
STA 3+089 RT



CURVE #9
Δ 09° 37' 57" RT
R 571.000 M
L 95.996 M
T 48.111 M
E 2.023 M
B 3.700%

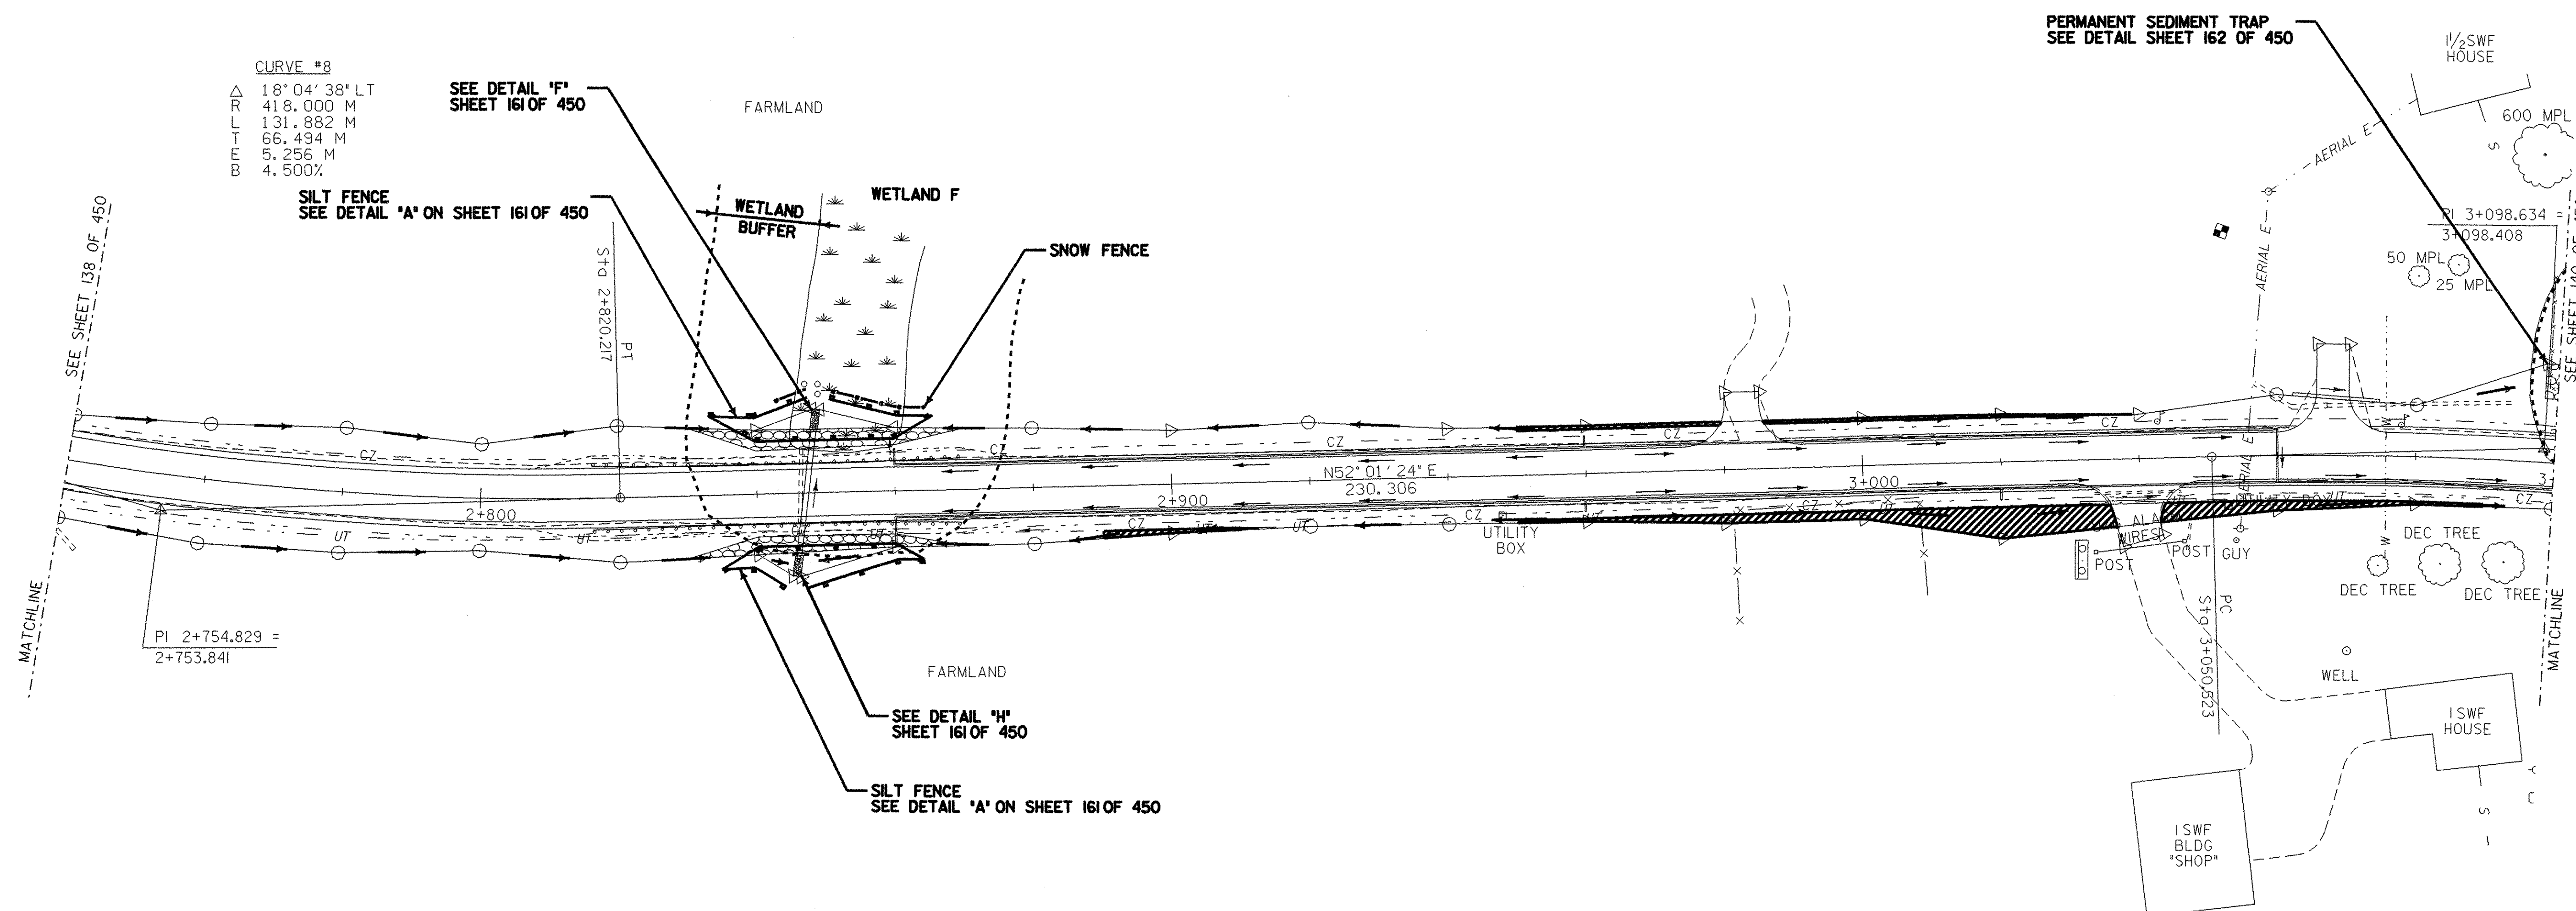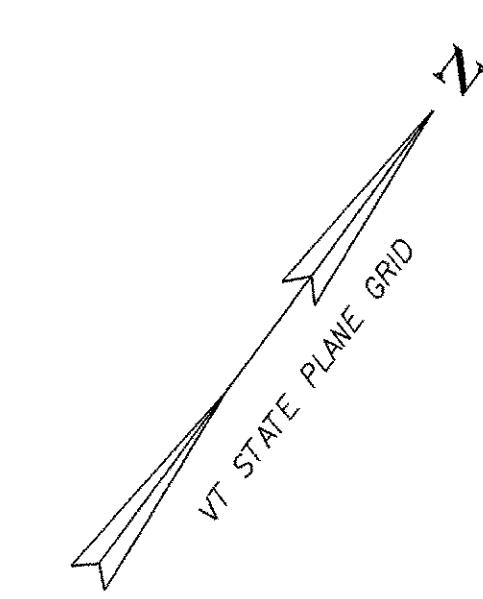

CURVE #8
Δ 18° 04' 38" LT
R 418.000 M
L 131.882 M
T 66.494 M
E 5.256 M
B 4.500%

SEE DETAIL 'F'
SHEET 161 OF 450

SILT FENCE
SEE DETAIL 'A' ON SHEET 161 OF 450

FARMLAND

WETLAND F
WETLAND BUFFER

SNOW FENCE

FARMLAND

SEE DETAIL 'H'
SHEET 161 OF 450

SILT FENCE
SEE DETAIL 'A' ON SHEET 161 OF 450

PERMANENT SEDIMENT TRAP
SEE DETAIL SHEET 162 OF 450

1/2 SWF HOUSE

600 MPL

PI 3+098.634 =
3+098.408

50 MPL
25 MPL


DEC TREE
DEC TREE
DEC TREE

WELL

I SWF HOUSE

I SWF BLDG 'SHOP'

EROSION CONTROL PLAN



LEGEND

- SILT FENCE
- SNOW FENCE
- DIRECTION OF DITCH FLOW
- PROJECT DEMARCATION FENCE
- WETLAND BUFFER
- STABILIZED CONSTRUCTION ENTRANCE
- EROSION MATTING

NOTES:

1. CONSTRUCTION SHALL TAKE PLACE BETWEEN MAY 1 AND OCTOBER 15. CONSTRUCTION IN A WATERCOURSE CHANNEL SHALL TAKE PLACE BETWEEN JUNE 1 AND OCTOBER 1. THE CONTRACTOR SHALL SUBMIT ANY CHANGES TO THIS SCHEDULE TO THE RESIDENT ENGINEER FOR APPROVAL AT OR BEFORE THE PRE-CONSTRUCTION MEETING.
2. THE LIMIT OF DISTURBANCE FOR THIS PROJECT SHALL BE THE LIMIT OF RIGHT-OF-WAY AS SHOWN ON THE EASEMENTS RIGHT-OF-WAY PLANS, UNLESS OTHERWISE SPECIFIED IN THE PLANS. CONSTRUCTION FENCE SHALL BE USED TO DELINEATE THE LIMIT OF DISTURBANCE IN AND AROUND WATERCOURSES AND WETLANDS. THE CONTRACTOR SHALL NOT IMPACT AREAS OUTSIDE THE LIMIT OF DISTURBANCE.
3. SEE THE EROSION CONTROL DETAIL SHEET FOR SEEDING FORMULAS AND ROCK CHECK DAM DETAIL.
4. CONTRACTOR TO STABILIZE ANY TEMPORARY CHANNELS AND DITCHES WITH STONE.
5. SILT FENCE LOCATIONS ARE APPROXIMATE ONLY. SILT FENCE TO BE INSTALLED ALONG THE CONTOURS.
6. MULCH SHALL BE APPLIED TO EXPOSED SOIL AT THE END OF EACH WORK DAY. SEED AND MULCH SHALL BE APPLIED TO SOIL WITHIN 48 HOURS OF FINAL DISTURBANCE. SEED AND MULCH SHALL ALSO BE APPLIED TO ANY TOPSOIL STOCKPILES. SEE APPLICATION RATES ON SHEET 3 OF 450.



PROJECT NAME: HIGHGATE - FRANKLIN
PROJECT NUMBER: STP RS 030(I) SA
FILE NAME: ...85c060/design/dc060ero.dgn PLOT DATE: 09-MAY-2005
PROJECT LEADER: DELLASANTA DRAWN BY: SQUAD B
DESIGNED BY: SQUAD B CHECKED BY: SQUAD B
IPARM FILE NAME: dc060er6.i SHEET 139 OF 450