


- NOTES:**
1. THESE PLANS SHOW A CONCEPTUAL EROSION CONTROL PLAN, THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
  2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER AND ON SITE COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
  3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER AND ON SITE COORDINATOR.
  4. REFER TO TEMPORARY EROSION CONTROL DETAIL SHEETS FOR ADDITIONAL DETAILS.
  5. WHERE LEDGE IS EXPOSED, GRAVEL BAGS MAY BE USED INSTEAD OF FILTER CURTAIN. PAYMENT FOR THIS ITEM SHALL BE INCIDENTAL TO ITEM 649.61 "GEOTEXTILE FOR FILTER CURTAIN".

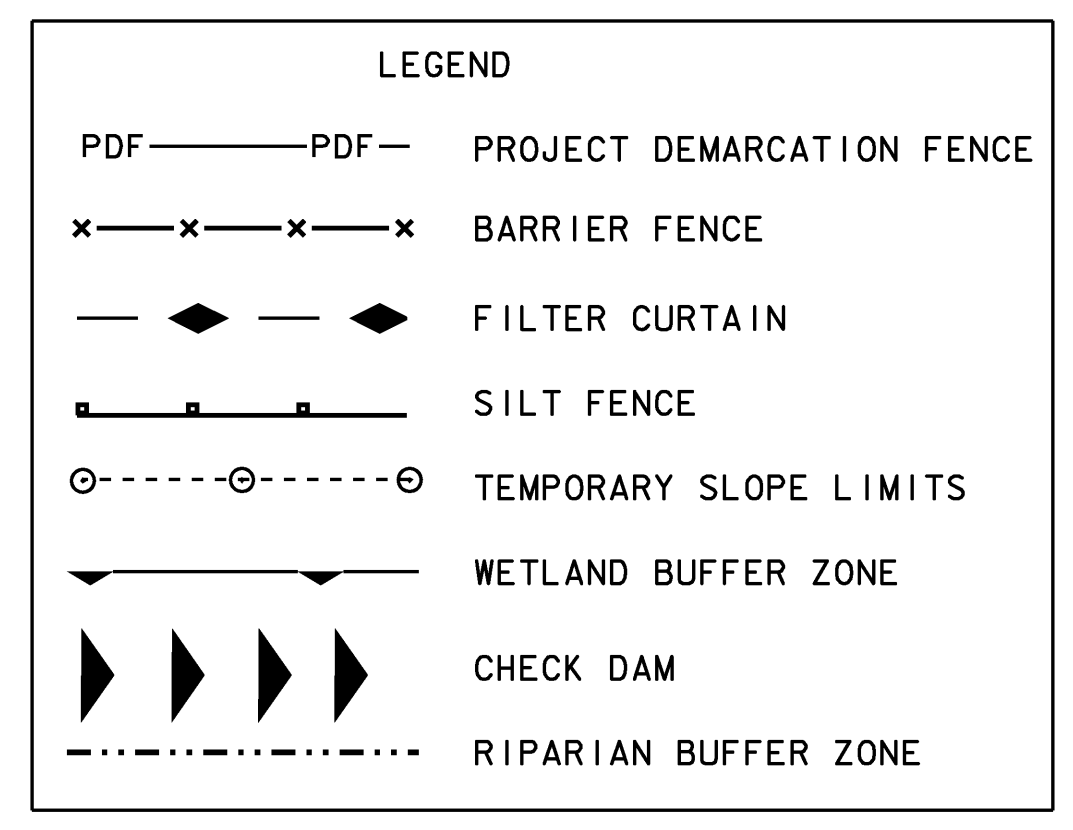

**SOIL INFORMATION**

SALMON-ADAMANT COMPLEX, 8 -15% SLOPES

HYDROLOGIC SOIL GROUP B

DEPTH TO BED ROCK: 5-7m

DEPTH TO WATER TABLE: 2 - 4m

HIGHLY ERODIBLE LAND

**SOIL INFORMATION**


ADAMS LOAMY FINE SAND, 8 -15% SLOPES

HYDROLOGIC SOIL GROUP A



DEPTH TO BED ROCK: 6m

DEPTH TO WATER TABLE: 4 - 5m

POTENTIALLY HIGHLY ERODIBLE LAND

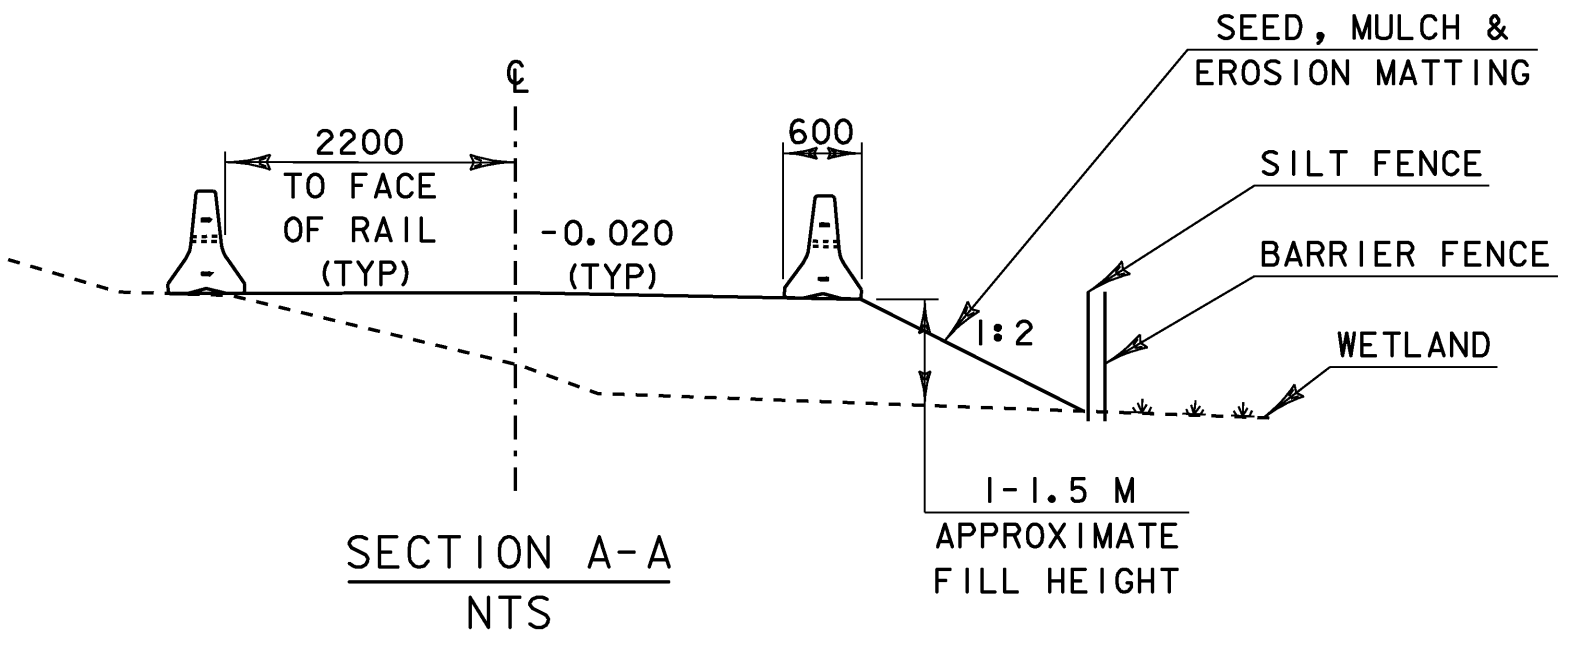

# EROSION PREVENTION AND SEDIMENT CONTROL PLAN

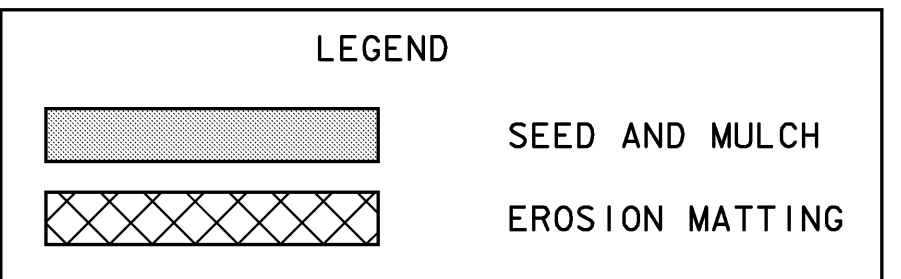

**DATUM**

VERTICAL	NAVD 88
HORIZONTAL	NAD 83 (92)



PROJECT: CABOT	PROJECT NO. : BRO 1446 (27)
DESIGN FILE NAME: 96j270/structures/sj270bdr_ero.dgn	PLOT DATE: 07-DEC-2007
IPARM FILE NAME: sj270ero.i	DRAWN BY: M.FESSEL
PROJECT LEADER: C.P.WILLIAMS	CHECKED BY: E.L.RUSTAY
DESIGNED BY: K.M.HIGGINS	SHEET: 32 OF 42
EROSION AND SEDIMENT CONTROL PLAN	