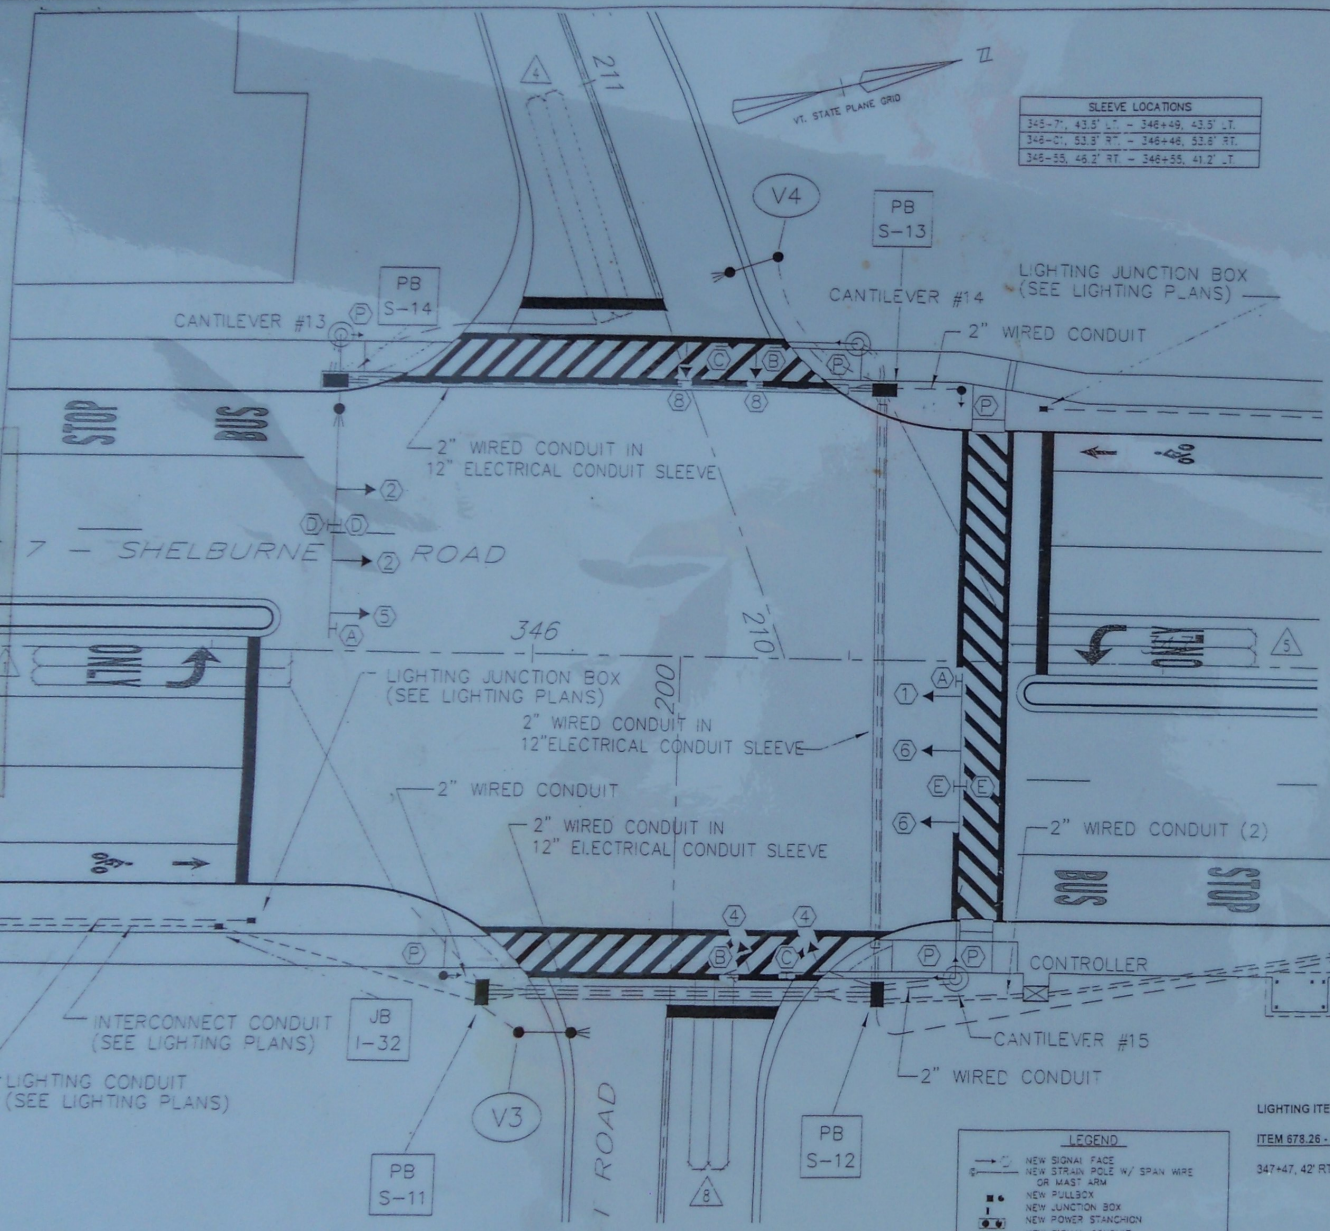

SLEEVE LOCATIONS
345+71, 43.5' LT. - 346+49, 43.5' LT.
346+01, 53.3' RT. - 346+46, 53.8' RT.
346+55, 46.2' RT. - 346+55, 41.2' LT.

FROM	TO	ITEM 678.20 (MOD.) INTERCONNECT CONDUIT 3"	ITEM 678.21 ELECTRICAL CONDUIT 2"	ITEM 678.23 WIRED CONDUIT 2"	ITEM 678.23 WIRED CONDUIT 2 1/2"	ITEM 678.30 ELECTRICAL CONDUIT SLEEVE 8"	ITEM 678.30 ELECTRICAL CONDUIT SLEEVE 12"	DESCRIPTION
POWER SOURCE	STANCHION			47				SHELBURNE RD.
POWER SOURCE	STANCHION			47				SIGNAL - POWER
STANCHION	JB L-33			65				SHELBURNE RD.
STANCHION	JB L-33			70				SIGNAL - POWER
STANCHION	JB L-33			70				VACT LIGHTING - POWER
JB L-33	CONTROLLER	65						INTERCONNECT
JB L-33	CONTROLLER			65				SIGNAL - POWER
JB L-33	PB S-12			95				VACT LIGHTING - POWER
JB L-33	PB S-11	43						INTERCONNECT
LOOP #1	PB S-11			27				LOOP 1
PED POLE	PB S-11			17				SIGNAL
LIGHT POLE V3	PB S-11			17				VACT LIGHTING
PB S-11	PB S-12		62			43		SPARE
PB S-11	PB S-12			62				VACT LIGHTING
PB S-11	PB S-12			62				SIGNAL
PB S-11	PB S-12	62						INTERCONNECT
PB S-11	PB S-12			62				LOOP 7
CANTILEVER #13	PB S-14			17				VACT LIGHTING
CANTILEVER #13	PB S-14			17				SIGNAL
CANTILEVER #13	PB S-14			17				PRE-EMPTION
LOOP #4	PB S-14			25				LOOP #4
PB S-14	PB S-13		87			78		SPARE
PB S-14	PB S-13			87				VACT LIGHTING
PB S-14	PB S-13			87				SIGNAL
PB S-14	PB S-13			87				LOOP #4 / PRE-EMPTION
LOOP #5	PB S-13			6				LOOP #5
CANTILEVER #14	PB S-13			19				SIGNAL
CANTILEVER #14	PB S-13		19					SPARE
PED POLE	PB S-13			22				SIGNAL
LIGHT POLE V4	PB S-13			39				VACT LIGHTING
PB S-13	PB S-12		97			87		SPARE
PB S-13	PB S-12			97				VACT LIGHTING
PB S-13	PB S-12			97				SIGNAL
PB S-13	PB S-12			97				LOOP #4, #5 / PRE-EMPTION
LOOP #8	PB S-12			8				LOOP #8
CANTILEVER #15	PB S-12			22				VACT LIGHTING
CANTILEVER #15	PB S-12			22				SIGNAL
CANTILEVER #15	PB S-12			22				PRE-EMPTION
PB S-12	CONTROLLER			25				SIGNAL
PB S-12	CONTROLLER			25				LOOP #1, #4, #5, #8 / PRE-EMPTION
PB S-12	CONTROLLER	25						INTERCONNECT
TOTAL		195	265	1448	94	211		

SIGNAL FACE ARRANGEMENT (12" LENSES)

PED FACE — FACE 2,4,6,8 — FACE 1,5

OVERHEAD SIGN ARRANGEMENT @ MAST ARM CANTILEVERS

ONLY (A) — (B)* — SHELBURNE RD (C) — LAKEVIEW DR (D) — HULLCREST RD (E)

* LED SIGNAL

LEGEND
NEW SIGNAL FACE
NEW STRAIN POLE W/ SPAN WIRE OR MAST ARM
NEW PULLBOX
NEW JUNCTION BOX
NEW POWER STANCHION
NEW SIGNAL CONDUIT
NEW INTERCONNECT CONDUIT
NEW POWER POLE

LIGHTING ITEMS	INTERCONNECT ITEMS	SIGNAL ITEMS
ITEM 678.26 - JUNCTION BOX	ITEM 678.26 - JUNCTION BOX	ITEM 678.27 - PULL BOX - DOUBLE
347+47, 42' RT. (L-33)	345+53, 44' RT. (I-32) 347+45, 44' RT. (I-33)	345+66, 44' LT. (S-14) 345+94, 54' RT. (S-11) 346+54, 44' LT. (S-13) 348+56, 54' RT. (S-12)

NOTE:
SEE SIGNAL DRAWING NOS. 1 & 2 FOR: TRAFFIC SIGNAL & GENERAL NOTES AND LIST OF SIGNAL EQUIPMENT

4/13/04

SCALE IN FEET 0 10 20

SHELBURNE

SURVEYED BY: U.S.C. INC. DATE
DRAWN BY: D.A.S. INC. DATE
TRACED BY: D.A.S. INC. DATE

PROJECT (M-ESC-019-4(27))
SIGNAL DRAWING NO. 9
SHEET NO. 227 OF 537

NOVD 1929
NAD 1927

INTERSECTION NO. MS-512 (US 7 - LAKEVIEW - HULLCREST)