


GTX™ City LED Signal Modules

• 8 and 12 inch

Mechanical Outline Dimensions in inches (mm)

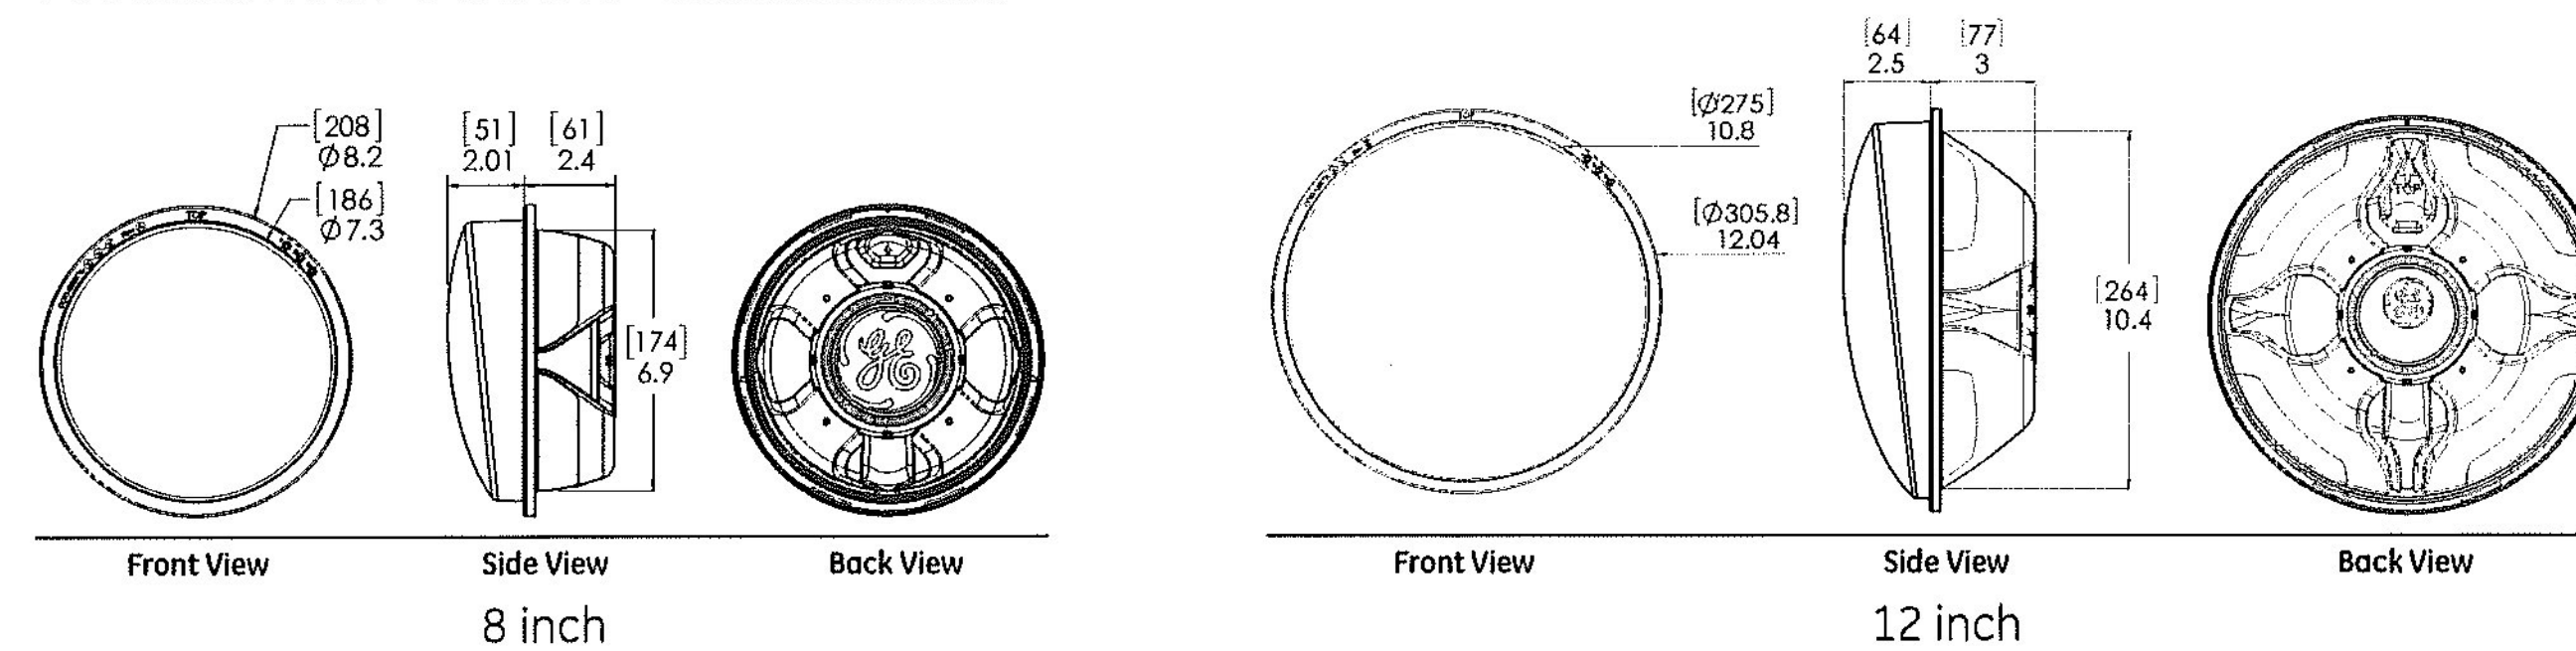

Design Compliance

Test type	Compliance
Luminous Intensity	ITE VTCSH-LED Circular Signal Supplement - June 2005
Chromaticity	ITE VTCSH-LED Circular - June 2005
Moisture Resistance	Blown Wind Rain MIL-STD-810F method 506.4
Mechanical Vibration	MIL-STD-883 Method 2007
Electronic Noise	FCC Title 47 Sub. B Sec 15 ¹
Transient Voltage Protection	Sec. 2.1.6 NEMA TS2-2003, 300V, 2500W Sec. 2.1.6 NEMA TS2-2003, 600V, 10µF Sec. 2.1.8 NEMA TS2-2003, 1kV, 2Ω
Controller Compatibility	ITE VTCSH-LED Circular Signal Supplement - June 2005
Wiring	NFPA 70, National Electric Code
Transient Suppression	Sec. 8.2 IEC 61000-4-5 & Sec. 6.1.2 ANSI/IEEE C62.41.2 - 2002, 3KV, 2 Ω Sec. 8.0 IEC 61000-4-12 & Sec. 6.1.1 ANSI/IEEE C62.41.2 - 2002, 6KV, 30 Ω

Operating Specifications

Parameter	Rating
Operating Temperature Range*	-40 to +74°C (-40 to +165°F)
Operating Voltage Range	80 to 135 V (60Hz AC)
Power Factor (PF)	> 90%
Total Harmonic Distortion (THD)	< 20%
Minimum Voltage Turn-Off (VTO)	35 V
Turn-On / Turn-Off Time	< 75 ms
Lens & Shell Material	UV Stabilized Polycarbonate
Wiring	8 in lamp: 40in, 20 AWG, Color Coded with Strain Relief ** 12 in lamp: 40in, 20 AWG, Color Coded with Strain Relief **

* Operating Temperature Range per ITE 2005, Section 3.3.2
** For CSA approved version : 40in, 18AWG, Color Coded with Strain Relief

Product Information


Model Number	Front Shell	Size (in)	AC Voltage Nominal	Power (W) Nominal	Wavelength (nm) nominal	Maintained Intensity (Cd) Minimum ²
● DR4-RTFB-VLA	Tinted	8	120V - 60Hz	6.7	628	165
○ DR4-RCFB-VLA	Clear	8	120V - 60Hz	6.7	628	165
● DR4-YZFB-VLA	Tinted	8	120V - 60Hz	10.9	588	410
○ DR4-YTFB-VLA	Tinted	8	120V - 60Hz	7.9	589	410
● DR4-YCFB-VLA	Clear	8	120V - 60Hz	7.9	589	410
○ DR4-GTFB-VLA	Tinted	8	120V - 60Hz	7.3	499	215
○ DR4-GCFB-VLA	Clear	8	120V - 60Hz	7.3	499	215
● DR6-RTFB-VLA	Tinted	12	120V - 60Hz	6.7	625	365
○ DR6-RCFB-VLA	Clear	12	120V - 60Hz	6.7	625	365
● DR6-YZFB-VLA	Tinted	12	120V - 60Hz	10.9	588	910
○ DR6-YTFB-VLA	Tinted	12	120V - 60Hz	9.9	589	910
○ DR6-YCFB-VLA	Clear	12	120V - 60Hz	9.9	589	910
● DR6-GTFB-VLA	Tinted	12	120V - 60Hz	8.4	501	475
○ DR6-GCFB-VLA	Clear	12	120V - 60Hz	8.4	501	475

Standard product equipped with universal connectors (insulated spade-quick disconnect).
All colors available in tinted or clear lens.


¹ Class A

² Measured at vertical angle of -2.5° and at horizontal angle of 0°.

Distributed by:



6 Sabattus Road - P.O. Box 1209 - Sabattus, ME 04280
ME Office - Tel: (207) 375-8248 - Fax: (666) 252-7011
NY Office - Tel: (607) 299-1604 - Fax: (866) 350-3162



GE Lighting • 1-888-MY-GE-LED • www.gelighting.com

1-888-69-43-5333 for North America • or • +1.216.266.2419

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. "The Greatest Signals Stand the Test of Time" are trademarks of GE Lighting, LLC. The GE brand and logo are trademarks of the General Electric Company. © 2014 GE Lighting, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

TRAF282-R120314