MM 141.350 SB

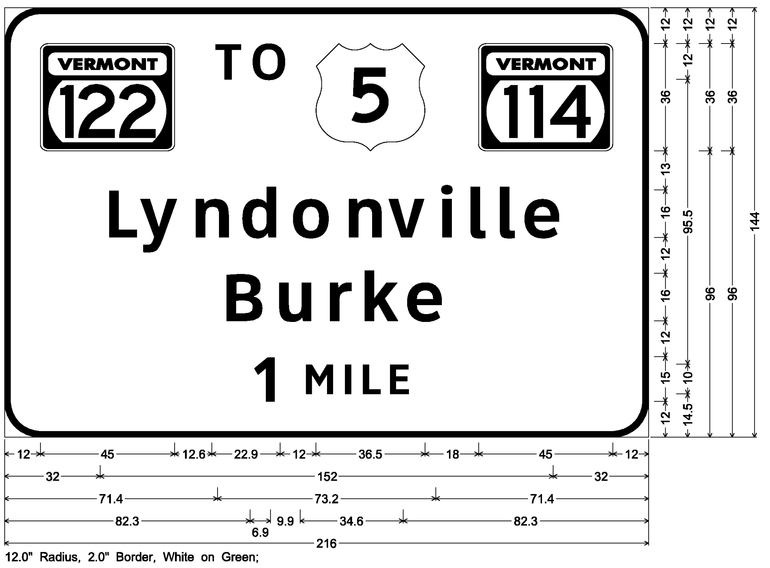

12.0" Radius, 2.0" Border, White on Green;
VT122; [TO] ClearviewHwy-5-W; VT114; [Lyndonville] ClearviewHwy-5-W; [Burke] ClearviewHwy-5-W;
[1 MILE] ClearviewHwy-5-W;

MM 142.400 NB
MM 153.430 NB

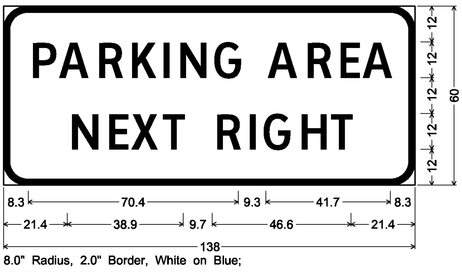

8.0" Radius, 2.0" Border, White on Blue;
[PARKING AREA] ClearviewHwy-3-W;
[NEXT RIGHT] ClearviewHwy-3-W;

MM 141.940 SB

8.0" Radius, 2.0" Border, White on Blue;
[REST AREA] ClearviewHwy-3-W;
[1] ClearviewHwy-5-W [MILE] ClearviewHwy-3-W;
6.0" Radius, 1.5" Border, White on Blue;
[NEXT FACILITY] ClearviewHwy-4-W;
[73 MILES] ClearviewHwy-4-W;

MM 141.200 SB

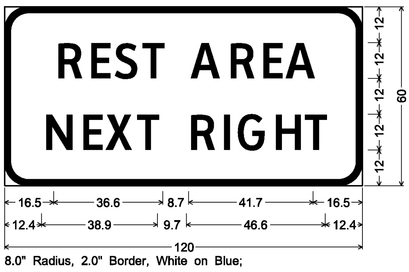

8.0" Radius, 2.0" Border, White on Blue;
[REST AREA] ClearviewHwy-3-W;
[NEXT RIGHT] ClearviewHwy-3-W;

MM 150.237 NB



6.0" Radius, 1.0" Border, 0.8" Indent, White on Green;
[HIGHEST] ClearviewHwy-2-W;
[ELEVATION] ClearviewHwy-2-W;
[I-91] ClearviewHwy-2-W;
[1856 FEET] ClearviewHwy-2-W;

MM 141.940 NB
MM 153.000 NB

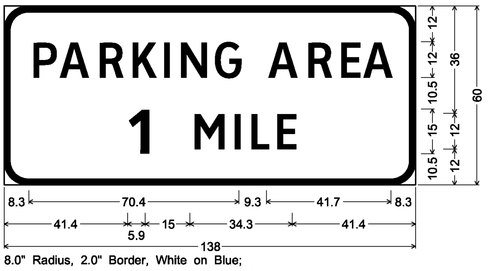

8.0" Radius, 2.0" Border, White on Blue;
[PARKING AREA] ClearviewHwy-3-W; [1] ClearviewHwy-5-W;
[MILE] ClearviewHwy-3-W;

MM 141.030 NB

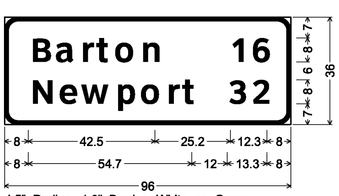

4.5" Radius, 1.3" Border, White on Green;
[Barton] ClearviewHwy-5-W;
[Newport] ClearviewHwy-5-W;
[16] ClearviewHwy-5-W;
[32] ClearviewHwy-5-W;

SIGN DETAIL SHEET 2

PROJECT NAME: LYNDON - DERBY
PROJECT NUMBER: IM IR 091-3(6)

FILE NAME: z87a022signdet.dgn
PROJECT LEADER: CRB
DESIGNED BY: PTS
CLD REF. NO.: 08-0159
PLOT DATE: 5/7/2009
DRAWN BY: NLL
CHECKED BY: BDB
SHEET 144 OF 160