

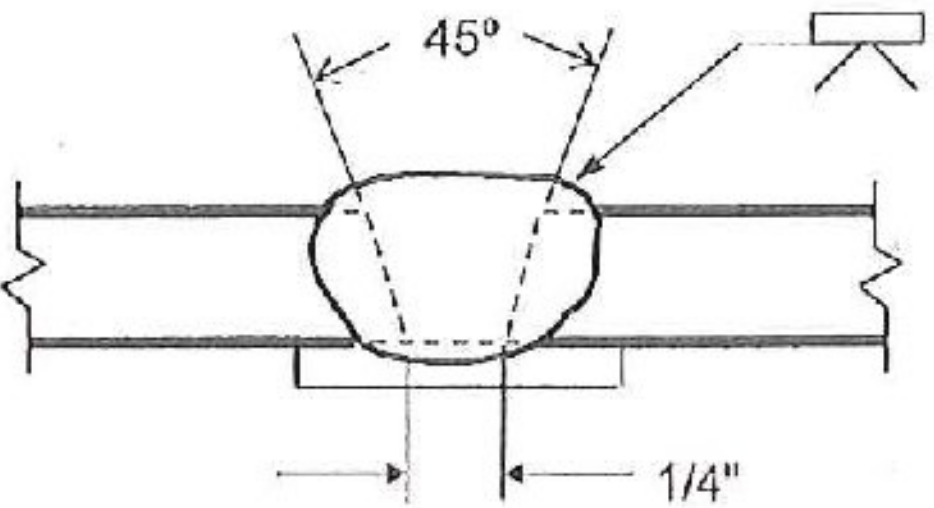
# Highway Safety Corporation

Glastonbury, CT

## Welding Procedure Specification

Material specification ASTM A500 gr B  
 Welding process Gas Metal Arc Welding (GMAW)  
 Manual, semi-automatic, or automatic Semi-Automatic  
 Position of welding Flat (1F) or Horizontal (2F)  
 Filler metal specification AWS A5.18  
 Filler metal classification ER70S-6  
 Electrode and manufacturer Lincoln Electric Lincoln Weld L-56  
 Flux and manufacturer N/A  
 Shielding gas 86% Argon / 14% CO2 Flow rate 35-45 CFM  
 Single or multiple pass Single  
 Single or multiple arc Single  
 Welding current DCEP  
 Polarity Reverse - electrode positive  
 Welding progression Stringers  
 Root treatment clean base metal  
 Preheat and interpass temperature base metal up to 3/4" (50°F)  
 Postheat treatment None  
 Electrode extension 3/4" ± 1/4"

### WELDING PROCEDURE

Weld size	Pass no.	Electrode size	Welding parameters		Travel speed	Joint detail
			Amperes	Volts		
	1	0.063"	300 A ± 30	29 V ± 2	15 lpm ± 2	B-U2a-GF 
			CKD JUL 18 2014 Resubmit BY	Vfrans Received OK'd BY JWC APPROVED DATE 7/24/14		

This procedure may vary due to fabrication sequence, fit-up, pass size, etc. within the limitation of variables given in section 5 of latest edition AWS D1.1

WPS no. W-VGwBCK Fabricator Highway Safety Corporation  
 Revision no. 0 Prepared By: Paul Radice  
 Supporting PQR no. Pre-Qualified Date 07-14-14  
 Project Name STOWE, VT Project Number BRF 029-1 (17)

Paul A Radice  
 CWI # 98070221  
 Exp. 7/1/2016

