STP 2401(I)

*STATION	*POSITION	*QUANTITY (SY)
NEWFANE		
VT 30		
1.758	RT	22.2
1.850	LT	7.1
1.891	LT	7.1
1.921	LT	8.0
1.945	RT	12.4
1.965	RT	5.3
1.991	RT	7.1
2.014	LT	14.2
2.053	LT	10.7
2.074	LT	10.7
2.100	RT	5.3
2.151	RT	6.2
2.164	LT	9.8
2.181	RT	6.2
2.265	RT	6.2
2.277	LT	5.3
2.323	RT	6.2
2.344	RT	8.0
2.363	RT	20.0
2.389	LT	9.8
2.421	LT	6.2
2.427	RT	8.0
2.445	RT	20.0
2.545	LT	8.9
2.569	RT	8.9
2.588	RT	8.0
2.634	LT	8.9
2.675	RT	8.9
2.689	RT	6.2
2.717	RT	8.0
2.737	RT	9.8
2.753	RT	6.2
2.762	LT	8.9
2.784	LT	30.0
2.789	RT	26.7
2.799	RT	5.3
2.824	RT	8.0
2.832	RT	5.3
2.836	LT	6.2
2.852	LT	5.3
2.861	RT	5.3
2.865	LT	5.3
2.878	RT	7.1
2.902	LT	8.9
2.999	RT	8.9
3.000	LT	5.3
3.030	LT	5.3
3.019	RT	5.3
3.043	LT	5.3
3.055	LT	6.2
3.055	RT	7.1
3.085	RT	17.8
3.117	LT	6.2
3.123	RT	5.3
3.171	LT	5.3
3.190	LT	7.1
3.217	RT	6.2
3.230	LT	53.3
3.239	LT	8.9
3.246	LT	8.0
3.284	RT	8.0
3.304	RT	10.7
3.366	LT	8.0
3.366	RT	9.8
3.378	RT	8.0
3.438	RT	8.9
3.509	RT	8.9
3.511	LT	6.2
3.545	LT	5.3
3.548	RT	8.0
3.566	RT	10.7

*STATION	*POSITION	*QUANTITY (SY)
3.587	RT	10.7
3.595	RT	8.0
3.603	LT	40.0
3.626	RT	8.9
3.683	RT	8.0
3.695	RT	8.9
3.829	RT	5.3
3.836	RT	5.3
3.958	LT	5.3
3.986	RT	8.9
4.014	RT	4.4
4.030	RT	7.1
4.041	LT	6.2
4.156	LT	6.2
4.226	RT	7.1
4.532	LT	8.9
4.628	LT	22.2
4.805	RT	35.6
4.815	LT	5.3
4.889	LT	10.7
5.400	RT	5.3
5.414	LT	10.7
5.455	RT	8.9
5.464	LT	8.9
5.503	RT	8.0
5.568	LT	13.3
5.611	LT	8.9
TOWNSHEND		
VT 30		
0.000	LT	10.7
0.044	RT	5.3
0.304	LT	7.1
0.328	RT	5.3
0.451	RT	9.8
0.576	LT	16.0
0.613	LT	16.0
0.628	LT	20.0
0.656	RT	6.2
0.658	LT	22.2
0.675	LT	8.0
0.686	RT	5.3
0.711	RT	13.3
0.738	RT	10.7
0.751	RT	6.2
0.830	RT	10.7
0.951	RT	5.3
0.991	LT	10.7
1.087	LT	5.3
1.107	RT	12.4
1.162	LT	5.3
1.184	RT	22.2
1.209	RT	5.3
1.224	LT	8.9
1.253	RT	16.0
1.264	LT	8.0
1.284	LT	10.7
1.301	LT	7.1
1.327	LT	7.1
1.327	RT	7.1
1.354	RT	6.2
1.365	RT	8.0
1.381	RT	7.1
1.444	RT	53.3
1.448	LT	5.3
1.484	LT	8.9
1.511	LT	8.9
1.732	LT	8.0
1.787	RT	7.1
1.802	RT	7.1
1.809	RT	8.9
1.836	LT	4.4
1.851	RT	44.4

STATION	POSITION	QUANTITY (SY)
TOWNSHEND		
VT 30		
1.873	LT	8.0
1.918	LT	8.9
1.919	RT	8.9
1.947	LT	13.3
1.954	RT	5.3
1.960	LT	13.3
1.969	RT	5.3
1.975	RT	5.3
1.980	LT	26.7
1.985	RT	5.3
1.997	LT	5.3
2.037	LT	8.9
2.044	RT	10.7
2.058	LT	4.4
2.095	LT	5.3
2.103	LT	4.4
2.118	LT	5.3
2.149	LT	9.8
2.164	LT	7.1
2.167	RT	7.1
2.177	LT	8.9
2.210	LT	8.9
2.281	RT	8.9
2.296	RT	6.2
2.299	LT	7.1
2.326	RT	16.0
2.383	RT	5.3
2.397	RT	5.3
2.419	RT	7.1
2.450	RT	20.0
2.487	LT	7.1
2.507	RT	5.3
2.565	RT	6.2
2.601	RT	5.3
2.710	RT	8.0
2.761	RT	7.1
3.001	LT	8.9
3.025	RT	9.8
3.038	LT	8.9
3.083	LT	7.1
3.155	RT	6.2
3.192	RT	8.0
3.197	LT	44.4
3.199	RT	7.1
3.222	LT	22.2
3.228	RT	6.2
3.449	RT	5.3
3.481	LT	10.7
3.643	LT	8.9
3.742	LT	22.2
3.810	RT	8.0
3.830	LT	13.3
3.903	RT	5.3
3.970	RT	6.2
4.070	LT	5.3
4.078	LT	57.8
4.165	LT	26.7
4.830	RT	8.0
4.873	RT	5.3
4.915	LT	17.8
5.069	RT	8.9
5.086	RT	6.2
5.510	RT	8.9
5.745	RT	8.0
5.788	RT	6.2
5.803	LT	14.2
5.870	RT	6.2
5.892	LT	17.8
5.930	LT	17.8
6.055	LT	5.3
6.080	RT	8.9

STATION	POSITION	QUANTITY (SY)
6.208	LT	17.8
6.242	LT	8.0
6.244	RT	10.7
6.265	LT	10.7
6.295	RT	8.0
6.502	LT	6.7
6.509	LT	5.3
6.538	LT	26.7
6.551	RT	10.7
6.553	LT	5.3
6.562	LT	5.3
6.592	LT	5.3
6.607	LT	5.3
6.620	LT	17.8
6.638	LT	5.3
6.647	LT	5.3
6.653	RT	10.7
6.677	RT	8.9
6.685	LT	5.3

STATION	POSITION	QUANTITY (SY)
6.710	RT	7.1
6.712	LT	8.0
6.768	RT	6.2
6.789	RT	8.0
6.968	RT	5.3
7.000	RT	8.0
7.001	LT	8.9
7.037	RT	7.1
7.138	LT	6.2
7.196	LT	7.1
7.249	RT	6.2
	SUBTOTAL	2324.8
	ROUNDING	25.2
	TOTAL	2350

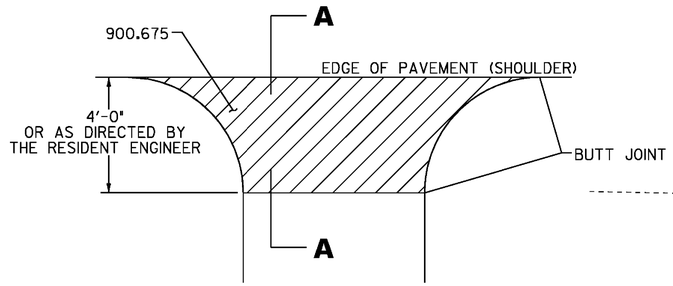

PLAN

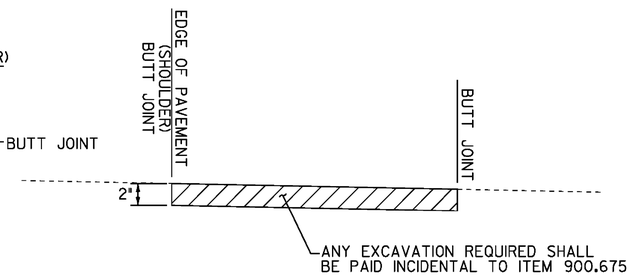

SECTION A - A

*PAVED DRIVEWAY POSITIONS AND QUANTITIES IN PROJECT COMPUTATION BINDER ON PG. 900675-1 TO 900675-7.

HANDWORK DETAILS FOR PAVED DRIVES

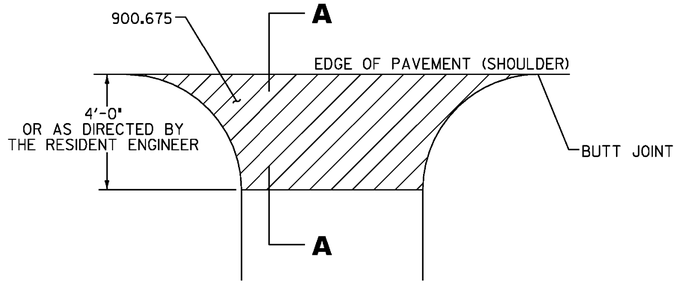

PLAN

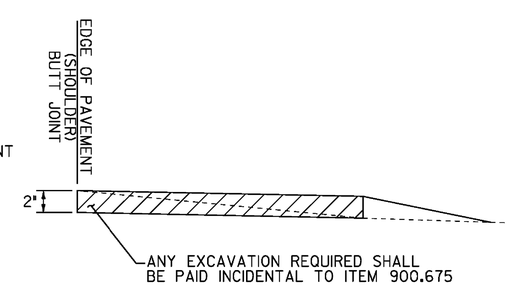

SECTION A - A

NOTES:

1. PAVING LIFT NOT TO EXCEED 2" (50mm)

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675.

3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675.

4. DRIVE RADII SHOULD CONFORM TO STANDARD B-71.

HANDWORK DETAILS FOR GRAVEL DRIVES

LEGEND

ITEM 900.675 - SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

NOT TO SCALE

DRIVEWAY DETAIL SHEET

PROJECT NAME: NEWFANE-TOWNSHEND

PROJECT NUMBER: STP 2401(I)

FILE NAME: p01b036.dgn
PROJECT LEADER: CRB
DESIGNED BY: JBZ
IPARM FILE NAME: p01b036_09.I

PLOT DATE: 04-FEB-2010
DRAWN BY: JBZ
CHECKED BY: BDB
SHEET 9 OF 32