STATE OF VERMONT
AGENCY OF TRANSPORTATION

TRAFFIC SIGN SUMMARY SHEET 13

VAOT Metric

KILOMETER MARKER, STATION, OR SIGN NUMBER	SIGN LEGEND	SIGN DIMENSIONS EA	WIDTH (mm)	HEIGHT (mm)	NEW & SALVAGED SIGNS "A"	"B"	SALV SIGN	SALV TIS	EXIST POST RETAIN	SALVAGE	NO. OF POSTS	NEW SIGN POSTS: FLANGED CHANNEL kg/m 1.7	3.0	4.5	SQUARE STEEL (mm) kg/m 44 3.4	50 3.9	63 5.0	ANCHOR	SLEEVE	TUBULAR ALUMINUM Ø (mm) kg/m 75 1.9	100 2.5	100 MOD 2.5	TUBULAR STEEL Ø (mm) FOUNDATION	kg/m 75 11.3	89 13.4	100 16.1	125 21.7	W-SHAPE STEEL FTG. SIZE 600 mm	750 mm	WEIGHT	POST SIZE	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL: DETAIL ON SHEET NUMBER	STD. SHEET NUMBER
	OPTION ITEMS																																			
	SUBTOTALS SHEET 1				6.60		0									36.8	0.00																			
	SUBTOTALS SHEET 2				4.61		0									27.6	0.00																			
	SUBTOTALS SHEET 3				2.89		1									23.0	0.00																			
	SUBTOTALS SHEET 4				4.97		1									13.8	9.20																			
	SUBTOTALS SHEET 5				5.98		0									13.8	9.20																			
	SUBTOTALS SHEET 6				5.36		2									23.0	9.20		2																	
	SUBTOTALS SHEET 7				2.77		6									41.4	0.00		6																	
	SUBTOTALS SHEET 8				6.75		0									13.8	0.00						2	133.0											
	SUBTOTALS SHEET 9				4.12		2									27.6	0.00																			
	SUBTOTALS SHEET 10				4.93		0									32.2	0.00																			
	SUBTOTALS SHEET 11				3.12		1									18.4	0.00																			
	SUBTOTALS SHEET 12				7.94		0									27.6	9.20																			

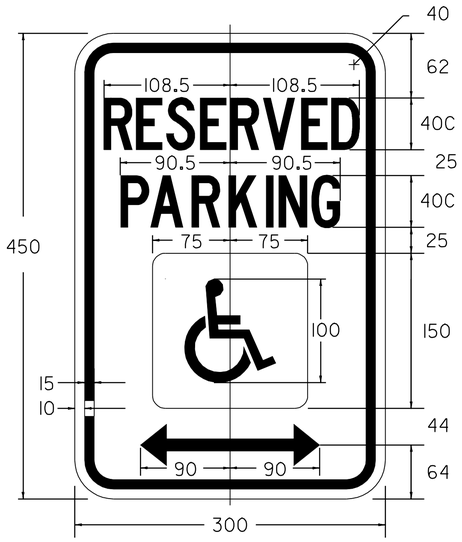

R7-8

COLORS:

LEGEND AND BORDER-GREEN
WHITE SYMBOL ON BLUE BACKGROUND
BACKGROUND WHITE

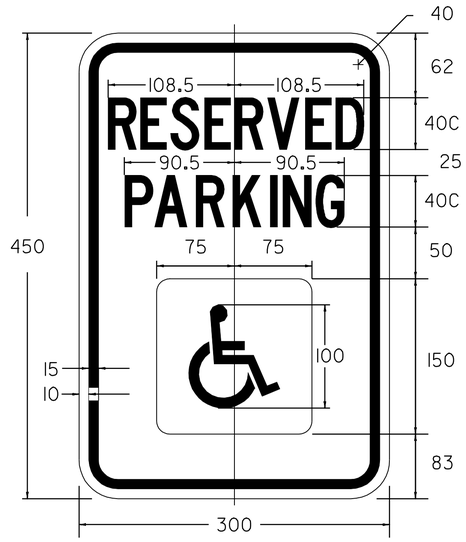

R7-8M

COLORS:

LEGEND AND BORDER-GREEN
WHITE SYMBOL ON BLUE BACKGROUND
BACKGROUND WHITE

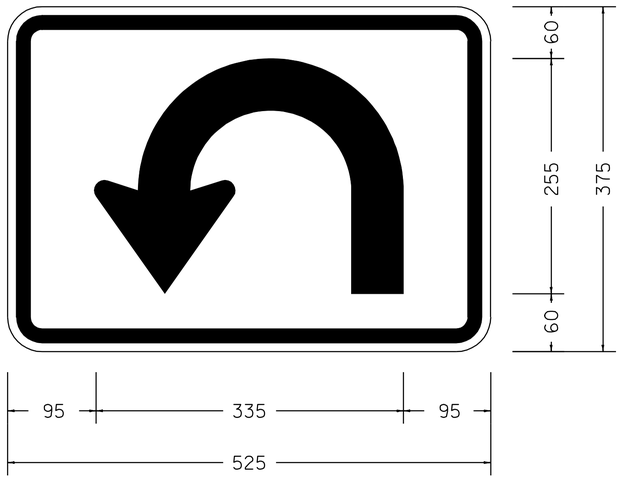

M5-3GL_21x15;
38mm RADIUS, 15mm BORDER, 10mm INDENT, GREEN ON WHITE;

NOT TO SCALE

NOTE: ALL DIMENSIONS IN MILLIMETERS EXCEPT AS INDICATED

FINAL POST LENGTHS ARE TO BE DETERMINED IN THE FIELD. POST SIZES ARE COMPUTED BASED ON INFORMATION FURNISHED ON THE STANDARD SHEETS AND THE ROADWAY TRAFFIC AND SAFETY SECTION'S "SIGN POST DESIGN GUIDELINE."

	m	m	m	m	m	m		EA	kg	kg	kg		kg	kg	kg	kg																				
					299.0	36.8		7					133.0																								
PROJECT TOTALS	m^2 60.04	m^2	EA. 13	m^2		m		m 335.8		kg		EA. 2		kg 133.0				EA.	EA.	kg																	

PROJECT : MIDDLEBURY	PROJECT NO. : STP 2304(I)S
DESIGN FILE NAME: /pave/0ld048/pb048.dgn	
IPARM FILE NAME: pb048tsl3.1	PLOT DATE: 06-OCT-2008
SURVEYED BY: CLD ENGINEERS INC	SURVEY DATE: 10/03
SQUAD LEADER: PTS	DRAWN BY: MRS
	SHEET: 54 OF 103