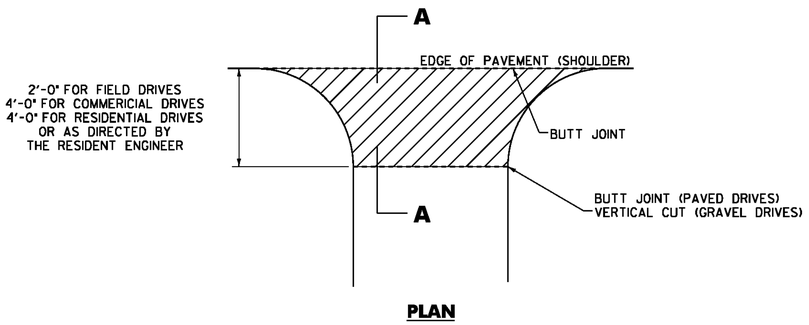

PLAN

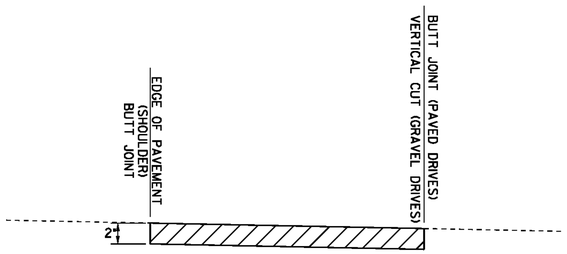

SECTION A-A

HANDWORK DETAILS FOR DRIVES

VT ROUTE 105

NOTES:

1. PAVING LIFT NOT TO EXCEED 2" (50mm)

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION (HAND PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)".

3. EXCAVATION OR FILL NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION (HAND PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)".

LEGEND

BITUMINOUS PAVEMENT, 900.675 "SPECIAL PROVISION (HAND PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)"

STATION	POSITION	TYPE	QUANTITY (SY)
NEWPORT			
126+87	RT	PAVED	12.7
127+80	RT	PAVED	10.0
128+31	RT	PAVED	14.3
129+42	RT	GRAVEL	8.5
130+23	LT	GRAVEL	12.4
131+23	LT	PAVED	24.3
132+13	RT	GRAVEL	18.6
132+50	LT	PAVED	9.8
133+18	LT	PAVED	7.2
133+48	RT	PAVED	57.7
133+84	LT	PAVED	11.6
136+33	LT	GRAVEL	15.7
137+34	RT	PAVED	66.9
137+55	LT	PAVED	25.1
139+49	LT	PAVED	10.4
139+55	RT	GRAVEL	11.3
140+48	RT	GRAVEL	7.8
141+41	RT	GRAVEL	8.8
144+46	RT	PAVED	178.4
147+85	RT	GRAVEL	34.1
148+68	RT	GRAVEL	18.5
149+40	LT	PAVED	62.5
151+55	LT	GRAVEL	11.6
152+34	LT	GRAVEL	13.9
152+79	RT	GRAVEL	15.5

STATION	POSITION	TYPE	QUANTITY (SY)
152+98	LT	GRAVEL	10.5
153+89	RT	FIELD	6.8
155+68	LT	FIELD	6.3
158+36	RT	FIELD	4.6
162+96	RT	PAVED	44.2
165+58	LT	FIELD	4.3
168+54	LT	GRAVEL	21.5
168+62	RT	GRAVEL	108.4
169+37	LT	GRAVEL	18.3
174+64	RT	GRAVEL	16.0
176+87	RT	GRAVEL	7.5
177+58	LT	GRAVEL	15.5
181+26	LT	GRAVEL	12.4
183+19	RT	GRAVEL	6.4
185+98	LT	GRAVEL	18.7
186+22	RT	FIELD	4.3
189+63	LT	FIELD	4.1
192+35	LT	GRAVEL	13.8
194+85	LT	FIELD	3.7
198+89	LT	FIELD	5.1
199+06	RT	FIELD	5.8
205+65	LT	GRAVEL	24.3
207+99	LT	GRAVEL	11.0
210+11	RT	GRAVEL	71.3
215+09	RT	PAVED	11.7
217+92	RT	PAVED	15.1
219+14	LT	GRAVEL	22.9

STATION	POSITION	TYPE	QUANTITY (SY)
220+41	RT	PAVED	101.8
221+00	LT	GRAVEL	156.6
242+62	RT	GRAVEL	20.4
244+25	LT	GRAVEL	9.9
250+24	RT	FIELD	4.3
255+08	RT	FIELD	3.5
257+03	RT	GRAVEL	29.2
257+13	LT	GRAVEL	21.2
259+82	LT	GRAVEL	25.2
262+63	LT	GRAVEL	84.7
264+75	RT	GRAVEL	15.6
264+98	LT	GRAVEL	25.3
267+75	LT	GRAVEL	54.9
272+79	RT	GRAVEL	20.5
COVENTRY			
1+97	LT	GRAVEL	12.8
2+03	RT	GRAVEL	12.9
3+45	LT	FIELD	4.5
4+17	RT	GRAVEL	14.5
7+08	RT	GRAVEL	20.8
10+15	LT	GRAVEL	20.6
11+40	RT	GRAVEL	14.4
13+53	LT	FIELD	4.0
14+80	RT	GRAVEL	96.3
18+20	RT	GRAVEL	23.4
19+20	LT	FIELD	4.1
20+60	RT	GRAVEL	9.8

STATION	POSITION	TYPE	QUANTITY (SY)
25+37	RT	PAVED	47.9
29+41	RT	GRAVEL	20.5
38+64	RT	GRAVEL	15.0
43+42	LT	GRAVEL	38.3
47+46	RT	GRAVEL	27.8
52+75	RT	GRAVEL	84.5
55+00	LT	PAVED	14.6
58+10	LT	GRAVEL	24.4
58+93	LT	GRAVEL	9.7
59+00	RT	PAVED	23.1
NEWPORT			
277+20	LT	GRAVEL	16.4
277+91	LT	PAVED	14.0
279+92	LT	PAVED	26.0
282+60	LT	GRAVEL	10.9
284+08	LT	PAVED	22.0
284+55	LT	PAVED	38.1
284+75	RT	GRAVEL	12.6
285+47	LT	PAVED	37.0
287+50	RT	GRAVEL	12.3
289+60	LT	PAVED	14.4
290+60	LT	GRAVEL	20.3
292+00	RT	GRAVEL	56.3
295+19	RT	GRAVEL	10.2
295+25	LT	GRAVEL	14.5
295+95	RT	PAVED	24.2
	SUBTOTAL		2608.3
	ROUNDING		41.7
	TOTAL		2650.0

DETAILS ARE NOT TO SCALE

HANDWORK DETAILS FOR DRIVES

PROJECT NAME: NEWPORT-COVENTRY-NEWPORT
PROJECT NUMBER: STP 2802(I)

FILE NAME: 08bl58.dgn
PROJECT LEADER: CDL
DESIGNED BY: SJL
PLOT FILE: 08bl58-7.1

PLOT DATE: 8/3/2011
DRAWN BY: SJL
CHECKED BY: EPD
SHEET 7 OF 134