DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) (LB / FT) 1.75 1.88	SQUARE STEEL (IN) (LB / FT) 2.00 2.42	SQUARE STEEL (IN) (LB / FT) 2.50 3.35	FOUNDATION	TUBULAR STEEL Ø (IN) (LB / FT) 3.00 7.60	TUBULAR STEEL Ø (IN) (LB / FT) 3.50 9.00	TUBULAR STEEL Ø (IN) (LB / FT) 4.00 10.80	TUBULAR STEEL Ø (IN) (LB / FT) 5.00 14.60	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL: DETAIL IN SHS	SIGN DETAIL: DETAIL ON SHEET NUMBER	SIGN DETAIL: DETAIL ON STD SHEET NUMBER
JAMAICA VT 100							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																			"SHS"-STANDARD HIGHWAY SIGNS			
SB	3.845	F	VD-062B	72	16		BUSINESS SIGN			1				X														
SB	3.770	F	W3-1	36	36								1		X													
		F	W3-1	36	36			9.00								2		X								X		
SB	3.732	F	M2-1	21	15								1		X													
		F	M1-5	24	24								1															
		F	M2-1	21	15			2.19								1		X								X	GREEN ON WHITE SHEETING		
		F	M1-5	24	24			4.00																					E-136B
SB	3.695	F	D1-1A	72	10								1		X														
		F	D1-1A	72	10								1																
		F	D1-1S	72	10								1																
		F	D1-1A	72	10								1																
		F	D1-1A	72	12		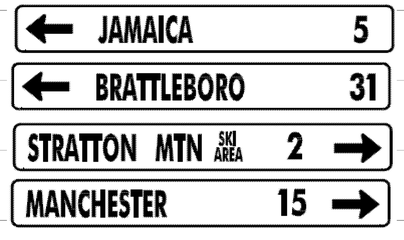	6.00								2			X								5	
		F	D1-1A	72	12			6.00																				5	
		F	D1-1	72	12			6.00																				5	
		F	D1-1A	72	12			6.00																				5	

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

SHEET TOTALS	39.19	0.00	1	0	0	7	0	0	5	75				
	SF	SF	EA	EA	EA	EA	EA	EA	EA	FT				
TOWN TOTALS	391.9	0.0	33.0	4.0	4.0	69	0.0	0.0	66	990.0				

PROJECT NAME: **Stamford-Andover VT100**
PROJECT NUMBER: **STPG SIGN(20)**
FILE NAME: **Jamaica.xls** PLOT DATE: **8/6/2009**
PROJECT MANAGER: **N. Averv** DRAWN BY: **T. Guazzoni**
DESIGNED BY: **M. Miller** CHECKED BY: **T. Guazzoni**
JAMAICA SHEET 11 SHEET **147** OF **198**