DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) 1.75 (LB / FT) 1.88	SQUARE STEEL (IN) 2.00 (LB / FT) 2.42	SQUARE STEEL (IN) 2.50 (LB / FT) 3.35	FOUNDATION	TUBULAR STEEL Ø (IN) 3.00 (LB / FT) 7.60	TUBULAR STEEL Ø (IN) 3.50 (LB / FT) 9.00	TUBULAR STEEL Ø (IN) 4.00 (LB / FT) 10.80	TUBULAR STEEL Ø (IN) 5.00 (LB / FT) 14.60	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL: DETAIL IN SHS	SIGN DETAIL: DETAIL ON SHEET NUMBER	SIGN DETAIL: DETAIL ON STD SHEET NUMBER
KILLINGTON			**VT 100**				FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																			"SHS"-STANDARD HIGHWAY SIGNS			
		F	M1-5	30	24		VERMONT ROUTE 100						1																
		F	M6-2S	21	15		LEFT ARROW (45 DEGREES)						1																
		F	M3-4	24	12		WEST						1																
		F	M1-4	24	24		US ROUTE 4						1																
		F	M6-2	21	15		RIGHT ARROW (45 DEGREES)						1																
SB	0.185	F	VR-925	36	30			7.50								2		X								INSTALL 80 FEET NORTH OF EXISTING AND AT BEGINNING OF SOLID WHITE LINE			E-145A
SB	0.170	F	VR-925	30	36		LANE ASSIGNMENT SIGN						1		X														
SB	0.100	F	M3-2	24	12			2.00								2		X							#3B	INSTALL AT BREAK IN CENTERLINE	X		
		F	M1-4	24	24			4.00																		BLACK ON WHITE SHEETING	X		
		F	M6-1L	21	15			2.19																		BLACK ON WHITE SHEETING	X		
		F	M3-3	24	12			2.00																		GREEN ON WHITE SHEETING	X		
		F	M1-5	30	24			5.00																		GREEN ON WHITE SHEETING			E-136B
		F	M6-1L	21	15			2.19																		GREEN ON WHITE SHEETING	X		
		F	M3-4	24	12			2.00																		GREEN ON WHITE SHEETING	X		
		F	M1-4	24	24			4.00																		BLACK ON WHITE SHEETING	X		
							SHEET TOTALS	30.88	0.00	0	0	0	6	0	0	4		60										
								SF	SF	EA	EA	EA	EA	EA	EA	EA		FT										
							TOWN TOTALS	567.0	0.0	28.0	0.0	0.0	114	0.0	0.0	88		1320.0										



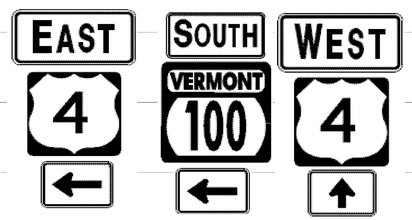

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: Ludlow-Waitsfield VT100
PROJECT NUMBER: STPG SIGN(27)

FILE NAME: Killington.xls
PROJECT MANAGER: N. Avery
DESIGNED BY: J. Kelly
KILLINGTON SHEET 14

PLOT DATE: 9/8/2009
DRAWN BY: I. Shea
CHECKED BY: N. Avery
SHEET 67 OF 204