DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) 1.75 (LB / FT) 1.88	SQUARE STEEL (IN) 2.00 (LB / FT) 2.42	SQUARE STEEL (IN) 2.50 (LB / FT) 3.35	TUBULAR STEEL Ø (IN) FOUNDATION	TUBULAR STEEL Ø (IN) 3.00 (LB / FT) 7.60	TUBULAR STEEL Ø (IN) 3.50 (LB / FT) 9.00	TUBULAR STEEL Ø (IN) 4.00 (LB / FT) 10.80	TUBULAR STEEL Ø (IN) 5.00 (LB / FT) 14.60	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL DETAIL IN SHS	SIGN DETAIL DETAIL ON SHEET NUMBER	SIGN DETAIL DETAIL ON STD SHEET NUMBER
TROY VT 100							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																		"SHS"-STANDARD HIGHWAY SIGNS			
		H	R1-1	30	30			6.25								1		X								X		
SB	0.720	F	S1-1	36	36		SCHOOL						1		X													
		F	S3-1	30	30		SCHOOL BUS STOP AHEAD						1															
		F	W11-2	30	30	FYG		6.25								1		X								X		
SB	0.660	F	R2-1	24	30								1		X													
		F	R2-1	24	30			5.00								1	X											
SB	0.630	F	N/A				KNIGHTS OF COLUMBUS SIGN --- REMOVE AND RETURN TO TOWN						1		X													
		f	S3-1	30	30			6.25								1		X								X		
SB	0.510	F	D1-1	72	10								1		X													
		F	D1-1	72	10								1															
		F	D1-1	72	10								1															
		F	D1-1	72	10		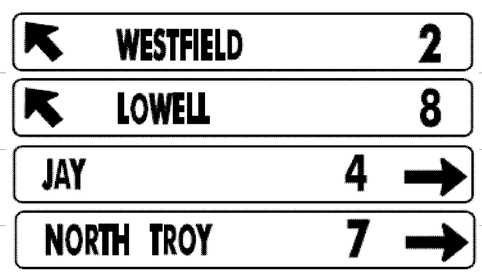						1															
		F	D1-1	72	12			6.00								2			X								5	
		F	D1-1	72	12			6.00																			5	
		F	D1-1	72	12			6.00																			5	
							SHEET TOTALS	41.75	0.00	0	0	0	8	0	0	6		90										
								SF	SF	EA	EA	EA	EA	EA	EA	EA		FT										
							TOWN TOTALS	334.5	0.0	7.0	2.0	2.0	60	0.0	0.0	55		825.0										

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: Moretown-Newport Town VT100
PROJECT NUMBER: STPG SIGN(28)

FILE NAME: Troy.xls
PROJECT MANAGER: N. Avery
DESIGNED BY: D. Crossley
TROY SHEET 7

PLOT DATE: 9/30/2009
DRAWN BY: I. Shea
CHECKED BY: J. Kelly
SHEET 145 OF 166