LOCATION OF DRIVES

STATION	POSTION	QUANTITY (SY)
N 355+67	LT	19
N 370+43	RT	3
N 385+22	LT	7
N 387+84	LT	3
N 388+22	RT	2
N 404+64	LT	15
N 417+57	RT	2
N 422+41	RT	2
N 422+89	LT	12
N 426+85	LT	5
N 426+96	RT	2
N 428+86	LT	11
N 449+95	LT	8
N 459+40	LT	5
N 468+58	LT	7
N 475+13	LT	17
N 475+81	LT	13
N 477+89	LT	13
N 478+63	LT	9
N 479+47	LT	7
N 480+56	LT	9
N 484+46	LT	10
N 485+25	RT	15
N 485+49	LT	14
N 485+97	RT	31
N 486+36	LT	7
N 486+62	RT	6
N 487+14	LT	52
N 488+06	RT	32
N 488+70	RT	7
N 488+81	LT	10
N 490+34	RT	54
N 490+60	LT	5
N 491+76	LT	5
N 497+93	RT	10
N 498+67	RT	11
N 499+47	LT	10
N 501+14	LT	33
N 506+35	LT	13
N 508+22	LT	17
N 508+78	RT	5
N 515+63	LT	9
NEWBURY US 5 SUBTOTAL		**1825**
RYEGATE US 5		
R 9+29	LT	12
R 17+73	RT	10
R 20+42	LT	14
R 20+53	RT	132
R 25+41	RT	9
R 32+28	RT	2
R 39+83	RT	5
R 41+53	RT	6
R 43+32	RT	7
R 44+78	RT	6
R 47+10	RT	6
R 58+06	RT	10
RYEGATE US 5 SUBTOTAL		**219**

STATION	POSTION	QUANTITY (SY)
NSH		
5+03	RT	21
7+94	RT	5
8+23	LT	3
11+64	RT	3
11+88	LT	4
17+46	RT	5
17+49	LT	6
20+27	LT	36
NSH SUBTOTAL		**83**
US 302		
M 245+84	RT	13
M 247+09	RT	35
M 251+46	RT	48
M 252+37	LT	69
M 254+14	LT	77
M 255+29	RT	15
M 256+43	LT	27
US 302 SUBTOTAL		**284**
PULLOFFS		
US 5		
115+95	LT	41
214+22	RT	145
262+60	RT	76
N 62+19	RT	188
N 295+80	RT	59
N 315+36	RT	100
N 352+91	LT	44
N 435+85	RT	40
N 472+78	LT	36
PULLOFF SUBTOTAL		**729**
BRADFORD US 5 SUBTOTAL		**1516**
NEWBURY US 5 SUBTOTAL		**1825**
RYEGATE US 5 SUBTOTAL		**219**
NSH SUBTOTAL		**83**
US 302 SUBTOTAL		**284**
PULLOFF SUBTOTAL		**729**
PROJECT SUBTOTAL		**4656**
ROUNDING		**44**
PROJECT TOTAL		**4700**

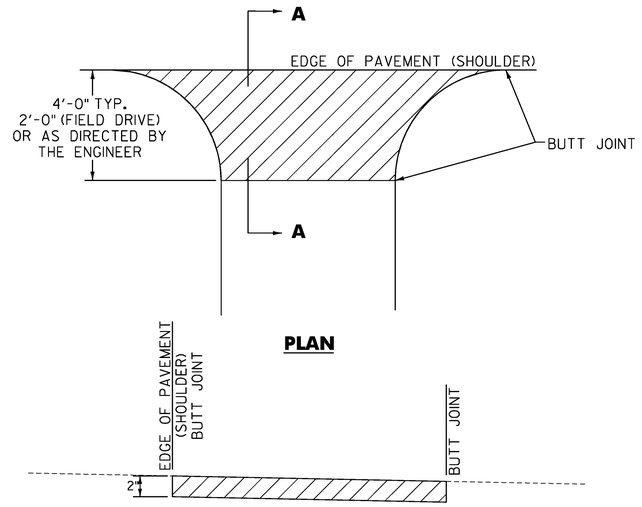

SECTION A – A

HANDWORK DETAILS FOR PAVED DRIVES

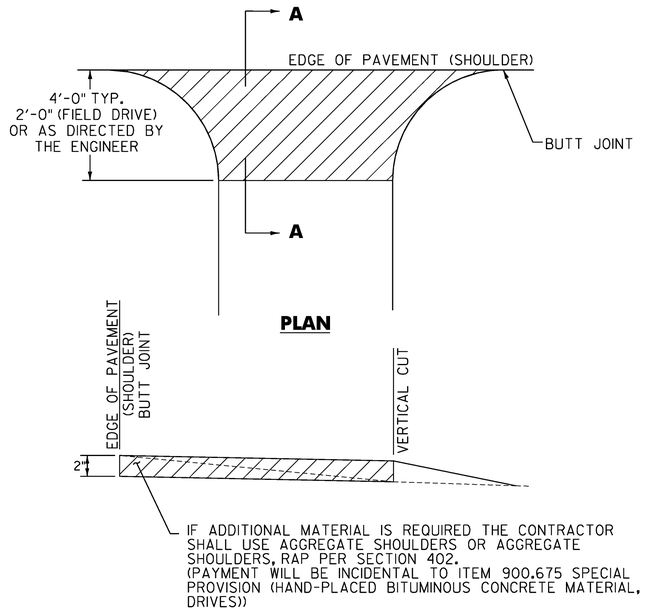

SECTION A – A

HANDWORK DETAILS FOR GRAVEL DRIVES

NOTES

1. PAVING LIFT NOT TO EXCEED TWO INCHES.

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES AT LEAST 24 HOURS BEFORE PAVING, WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE AND PULLOFF SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

LEGEND

ITEM 900.675 - SPECIAL PROVISION
(HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

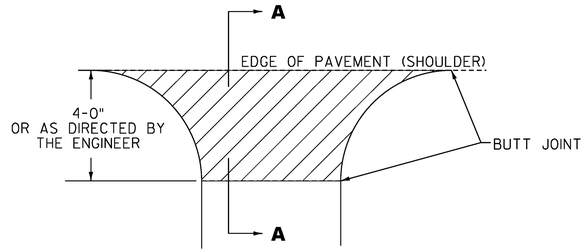

SECTION A – A

HANDWORK DETAILS FOR PULLOFFS

NOT TO SCALE

PROJECT NAME:	BRADFORD-RYEGATE
PROJECT NUMBER:	STP 2929(I)
FILE NAME: z10c264frm.dgn	PLOT DATE: 2/4/2016
PROJECT LEADER: P. SHEDD	DRAWN BY: W. GORDON
DESIGNED BY: N. LEMAY	CHECKED BY: P. SHEDD
HANDWORK DETAIL SHEET 2	SHEET 51 OF 239

CLD 14-0278