DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS		EXISTING SIGNS				EXIST POST		NUMBER OF NEW POSTS	SQUARE STEEL (IN)			TUBULAR STEEL Ø (IN)				SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL LOCATION		
								"A"	"B"	RETAIN	SALVAGE FROM	SALVAGE TO	REMOVE	RETAIN	REMOVE		1.75 (LB / FT) 1.88	2.00 (LB / FT) 2.42	2.50 (LB / FT) 3.35	FOUNDATION	3.00 (LB / FT) 7.60	3.50 (LB / FT) 9.00	4.00 (LB / FT) 10.80	5.00 (LB / FT) 14.60			SHSM	PROJECT SHEET #	STANDARD SHEET #
WINOOSKI VT-15 WB							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																		"SHSM"-STANDARD HIGHWAY SIGNS AND MARKINGS			
		F	M3-3	24	12		SOUTH						1															
		F	M1-1	24	24		INTERSTATE 89						1															
		F	M6-1	21	15		LEFT ARROW						1															
		F	M4-5	24	12		TO						1															
		F	M3-1	24	12		NORTH						1															
		F	M1-1	24	24		INTERSTATE 89						1															
		F	M6-3	21	15		UP ARROW						1															
		F	M3-4	24	12	GRN WHT	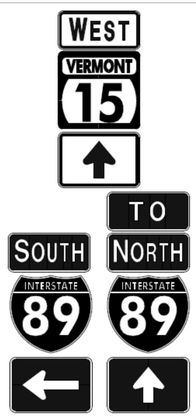	2.00												1	118				#2			X		
		F	M1-5	24	24	GRN WHT		4.00																				E-136B
		F	M6-3	24	15	GRN WHT		2.50																			X		
		F	M3-3	24	12	WHT BLUE		2.00																			X		
		F	M1-1	24	24	WHT BLUE		4.00																			X		
		F	M6-1	21	15	WHT BLUE		2.19																			X		
		F	M4-5	24	12	WHT BLUE		2.00																			X		
		F	M3-1	24	12	WHT BLUE		2.00																			X		
							SHEET TOTALS	20.69	0.00	0	0	0	7	0	0	0	0.0			1	118.0	0.0	0.0	0.0					
								SF	SF	EA	EA	EA	EA	EA	EA	EA	FT			EA	LB	LB	LB	LB					
							TOWN DIRECTIONAL TOTALS	282.75	0.0	29	15	15	98	0	0	30	450.0			1	118.0								

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: WINOOSKI-CAMBRIDGE
PROJECT NUMBER: STPG SIGN(55)

FILE NAME: WINOOSKI VT15 WB TSS.xls
PROJECT MANAGER: M. FOISY
DESIGNED BY: D. DRAPER
WINOOSKI WB SHEET 3

PLOT DATE: 6/14/2016
DRAWN BY: D. DRAPER
CHECKED M. FOISY
SHEET 37 OF 192