STATE OF VERMONT
AGENCY OF TRANSPORTATION

TRAFFIC SIGN SUMMARY SHEET

MILE MARKER, STATION OR SIGN NUMBER	SIGN LEGEND	SIGN DIMENSIONS			NEW & SALVAGED SIGNS				EXIST POST		NEW SIGN POSTS																					REMARKS	SIGN DETAIL	
											NO. OF	FLANGED CHANNEL			SQUARE STEEL (in)					TUBULAR ALUMINUM Ø (IN)			TUBULAR STEEL Ø (IN)					W-SHAPE STEEL						STANDARD HIGHWAY SIGNS AND MARKINGS (SHSM)	SIGN DETAIL SHEET NUMBER
		EACH	WIDTH (in)	HEIGHT (in)	"A"	"B"	SALV SIGN	SALV TIS	RETAIN	SALVAGE	POST	(LB / FT)			1.75 (LB / FT)	2.00 (LB / FT)	2.50 (LB / FT)	ANCHOR	SLEEVE	3.00 (LB / FT)	4.00 (LB / FT)	4.0 MOD (LB / FT)	FOUNDATION	3.00 (LB / FT)	3.50 (LB / FT)	4.00 (LB / FT)	5.00 (LB / FT)	FTG. SIZE 24"	FTG. SIZE 30"	WEIGHT	POST SIZE	SIGN FRAME REQUIRED			
												1.12	2.00	3.00	1.88	2.42	3.35			1.30	1.70	1.70		7.60	9.00	10.80	14.60								
OPTION ITEMS																																			
10+03, RT		1	30.00	30.00	6.25				1																							INSTALL NEW W3-3 ON EXISTING POST	X	
16+11 RT		1	48.00	24.00	8.00						2					30.00		2														INSTALL NEW R3-8b WITH A MINIMUM SPACING OF 100 FT BETWEEN EXISTING SIGNS	X	
15+10, RT	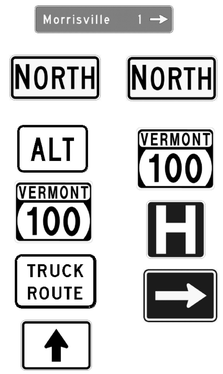	1 2 2 2 2 1					1 2 2 2 2 1				2													2		270.00								SALVAGED SIGN TO BE INSTALLED ON NEW STEEL TUBE POSTS WITH BREAK AWAY MOUNTS		
17+16, RT		1					1			2																						SALVAGED SIGN TO BE REINSTALLED		
17+36, RT		1					1			1																						SALVAGED SIGN TO BE REINSTALLED		
17+50, LT		1					1			1																						SALVAGED SIGN TO BE REINSTALLED		
19+30, RT		1	24.00	96.00	16.00																											D3-1a MOUNT ON MAST ARM (MA-3)		42
17+84, LT		1	24.00	96.00	16.00																											D3-1b MOUNT ON MAST ARM (MA-1)		42
FINAL POST LENGTHS ARE TO BE DETERMINED IN THE FIELD. POST SIZES ARE COMPUTED BASED ON INFORMATION FURNISHED ON THE STANDARD SHEETS AND THE VTRANS "SIGN POST DESIGN GUIDELINE."												FT .	FT .	FT .	FT .	FT 30.00	FT .	XXXXX XXXXX XXXXX XXXXX	EA .	LB .	LB .	LB .		LB .	LB 270.00	LB .	LB .								
	TOTALS				SF 46.25	SF .	EA. 13	SF .	XXXXXXXXXX XXXXXXXXXX XXXXXXXXXX			FT .			FT 30.00					LB .			EA. 2	LB 270.00				EA. .	EA. .	LB .					

McFarland Johnson

PROJECT NAME: MORRISTOWN
PROJECT NUMBER: STPG SGNL(47)

FILE NAME: z15T047tssl.dgn
PROJECT LEADER: J. SANTACRUCE
DESIGNED BY: R. LUCHINI
TRAFFIC SIGN SUMMARY SHEET 1

PLOT DATE: 5/13/2016
DRAWN BY: R. LUCHINI
CHECKED BY: B. COLBURN
SHEET 40 OF 58