INDEX OF SHEETS
SEE SHEET 2 OF 43

# STATE OF VERMONT
# AGENCY OF TRANSPORTATION

## PROPOSED IMPROVEMENT
## TOWNS OF MANCHESTER AND WINHALL
## COUNTY OF BENNINGTON
## VT. ROUTE 11

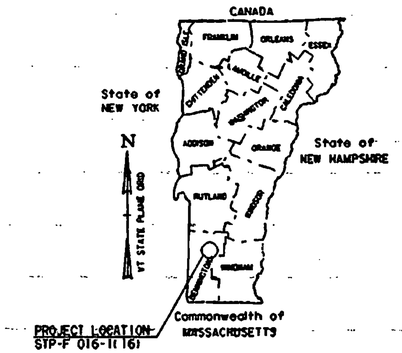


BEGINNING IN MANCHESTER AT A POINT 4910.109 m EAST OF MANCHESTER CENTER AT MILEMARKER 3.051 = STA. 4+910.109 AND EXTENDING EASTERLY ALONG VT. ROUTE 11 FOR A DISTANCE OF 5711.561 m (3.549 MILES) TO A POINT IN WINHALL AT MILEMARKER 3.355 = STA. 5+399.349

| | | |
|---|---|---|
| LENGTH OF ROADWAY | 5711.561 m | (3.549 MILES) |
| LENGTH OF PROJECT | 5711.561 m | (3.549 MILES) |

WORK TO BE PERFORMED UNDER THIS PROJECT INCLUDES COLD MIXED RECYCLING, EXCAVATION OF SURFACES AND PAVEMENTS, COLD PLANING, RESURFACING OF THE EXISTING HIGHWAY WITH A SHIM / LEVELING COURSE AND WEARING COURSE, NEW PAVEMENT MARKINGS, DRAINAGE IMPROVEMENTS, GUARDRAIL IMPROVEMENTS, SAFETY IMPROVEMENTS AND INCIDENTAL ITEMS.

### TRAFFIC DATA

VT. ROUTE 11 (MM 3.051 TO WINHALL STATE HIGHWAY)
1998 ADT = 7480
1998 DHV = 1355
2008 ADT = 8900
2008 DHV = 1610

1998 ~ 2008 CUM. ESALS = 1,523,000

VT. ROUTE 11 (WINHALL STATE HIGHWAY TO MM 3.283)
1998 ADT = 6510
1998 DHV = 1180
2008 ADT = 7740
2008 DHV = 1400

1998 ~ 2008 CUM. ESALS = 1,325,000

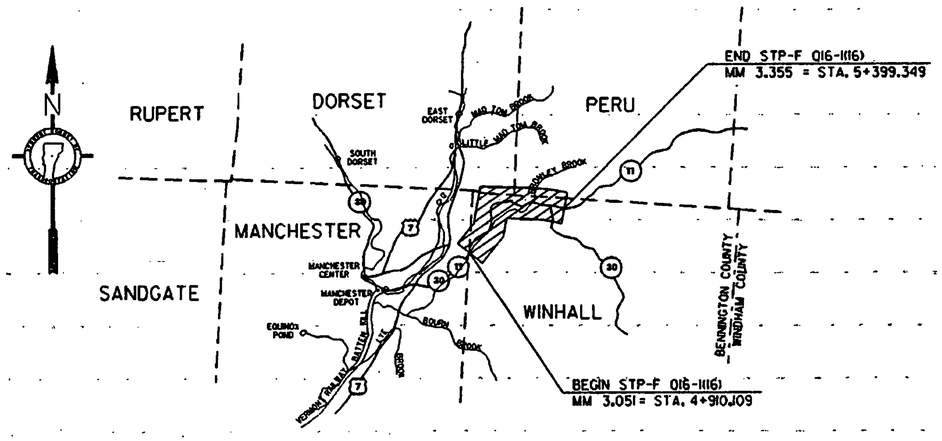


UNLESS OTHERWISE NOTED, ALL DRAWINGS AND DETAILS OF THE PROJECT PLANS ARE NOT TO SCALE

RIGHT OF WAY LIMITS, IF APPLICABLE, ARE PROVIDED SOLELY FOR THE CONVENIENCE OF THE STATE AND ITS CONTRACTOR DURING THE COURSE OF THIS PAVING PROJECT. ANY REFERENCES TO OFFSETS ON THESE PLANS ARE APPROXIMATE AND SHOULD NOT BE RELIED UPON FOR ANY OTHER PURPOSES

### CONVENTIONAL SIGNS

COUNTY LINE
TOWN LINE
LIMITS OF ACCESS
POINT OF ACCESS
FENCE LINE
STONE WALL
TRAVELED WAY
GUARD RAIL
RAILROAD
SURVEY LINE
CULVERT
POWER POLE
TELEPHONE POLE
TREES
CONTROL OF ACCESS
PROPERTY LINE
R.O.W. TAKING LINE
SLOPE RIGHTS
TOP OF CUT
TOE OF SLOPE

DATUM
VERTICAL N/A
HORIZONTAL N/A

THESE PLANS ARE SUBJECT TO SUCH ENGINEERING CHANGES AS MAY BE REQUIRED BY THE FEDERAL HIGHWAY ADMINISTRATION OR THE DIRECTOR OF CONSTRUCTION AND MAINTENANCE.

CONSTRUCTION IS TO BE CARRIED ON IN ACCORDANCE WITH THESE PLANS AND THE STANDARD SPECIFICATIONS FOR CONSTRUCTION DATED 1995, AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION ON AUGUST 21, 1995 FOR USE ON THIS PROJECT, INCLUDING ALL SUBSEQUENT REVISIONS AND SUCH REVISED SPECIFICATIONS AND SPECIAL PROVISIONS AS ARE INCORPORATED IN THESE PLANS.

Metric

APPROVED _____ DATE _____
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED _____ DATE _____
DIVISION ADMINISTRATOR

PROJECT MANCHESTER - WINHALL
STP-F 016-1(16)
SHEET 6 OF 43 SHEETS

/pave/89b016/pb016.dgn pb016t1.1 PLOTTED:20-JAN-1998

: Sheet Number: 6