TREE PROTECTION BARRIER DETAILS

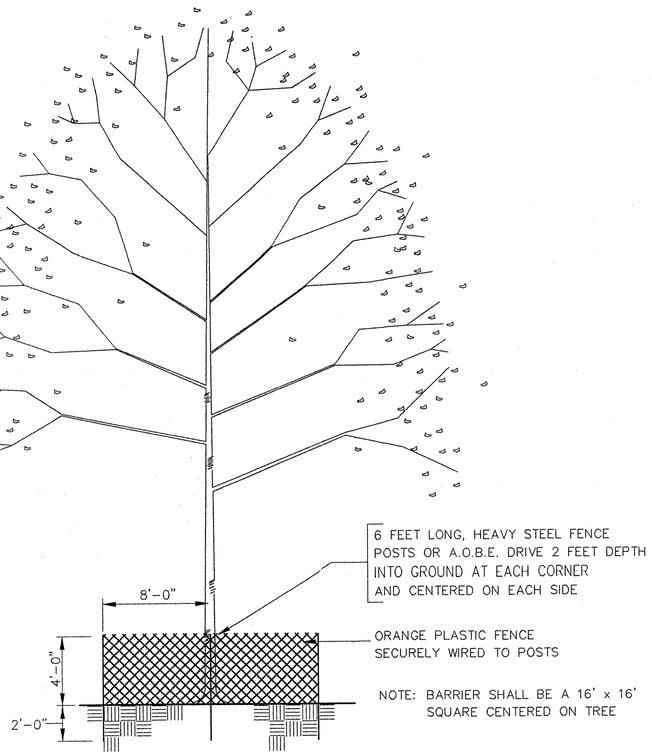

ELEVATION

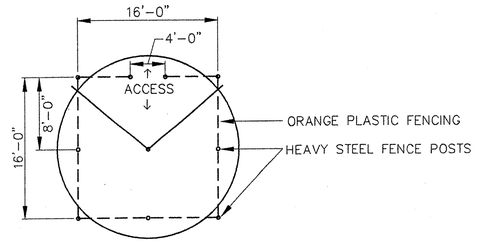

NOTE: ORIENT ACCESS AWAY FROM STREET

PLAN

TREE PROTECTION BARRIER DETAILS

N.T.S.

TREE PROTECTION BARRIER TABLE			
STATION	SIDE	SPECIES	LENGTH
375+03	LT	LOCUST	60
375+49	LT	LOCUST	60
379+63	LT	BUSH	60
379+76	LT	BUSH	60
*340+65	RT	ASH	60
*341+10	LT	MAPLE	60
*341+73	RT	ASH	60
*342+43	LT	MAPLE	60
*342+57	LT	MAPLE	60
384+52	RT	ORNAMENTAL	60
384+84	RT	ORNAMENTAL	60
385+12	RT	ORNAMENTAL	60
388+09	LT	BIRCH	60
392+06	RT	MAPLE	60
392+32	RT	MAPLE	60
392+85	RT	MAPLE	60
393+16	RT	MAPLE	60
393+45	RT	MAPLE	60
393+72	RT	MAPLE	60
395+56	LT	BIRCH	60
395+95	LT	APPLE	60
396+61	RT	MAPLE	60
399+46	RT	MAPLE	60
402+99	RT	BOXELDER	60
403+20	RT	BOXELDER	60
*390+07	RT	APPLE	60
*402+00	LT	ORNAMENTAL	60
411+75	LT	APPLE	60
413+14 to 413+37	LT	APPLES	**
415+13	RT	MAPLE	60
416+82	RT	MAPLE	60
417+03	RT	SYCAMORE	60
417+65	LT	MAPLE	60
417+90	LT	MAPLE	60
418+19	LT	MAPLE	60
418+29	RT	BIRCH	60
418+44	RT	BIRCH	60
418+58	RT	BIRCH	60
419+35	RT	MAPLE	60
419+42	RT	MAPLE	60
420+08	RT	MAPLE	60
420+33	RT	MAPLE	60
420+75	RT	MAPLE	60
420+80	RT	MAPLE	60
421+11	RT	ASPEN	60
421+88	RT	MAPLE	60
*412+80	RT	LOCUST	60
422+65 to 423+00	RT	(VARIES)	**
423+00 to 423+33	RT	(VARIES)	**
*430.97	RT	ORNAMENTAL	60
		SUB-TOTAL	2820

TREE PROTECTION BARRIER TABLE			
STATION	SIDE	SPECIES	LENGTH
*431+16	RT	SPRUCE	60
*431+92	RT	ORNAMENTAL	60
*432+21	RT	ORNAMENTAL	60
425+23	LT	ORNAMENTAL	60
425+68	LT	ORNAMENTAL	60
425+72	RT	MAPLE	60
426+12	LT	ORNAMENTAL	60
426+18	RT	PINE	60
426+58	LT	ORNAMENTAL	60
427+28	LT	ORNAMENTAL	60
427+80	LT	ORNAMENTAL	60
428+65	LT	ORNAMENTAL	60
428+91	LT	PINE	60
*402+28	LT	LOCUST	60
		SUB-TOTAL	780
		TOTAL	3660

TREE PROTECTION BARRIER TABLE			
STATION	SIDE	SPECIES	LENGTH

NOTE

(*) = SIDE STREET OR JUGHANDLE OR DRIVE

(**) = INCLUDED ON EROSION CONTROL PLANS

DATUM
VERTICAL NGVD 1929
HORIZONTAL NAD 1927

4/4/03

SHELBURNE - SOUTH BURLINGTON

SURVEYED BY V.S.C. INC. DATE
DRAWN BY E.A.A. INC. DATE
TRACED BY E.A.A. INC. DATE

PROJECT NH-EGC-019-4(28)
MISCELLANEOUS DETAIL DRAWING NO. 1
SHEET NO. 66 OF 283