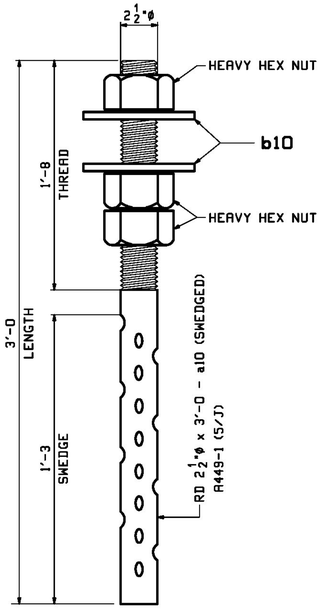

17 ~ SWEDGE ANCHOR ROD ~ 10AB1

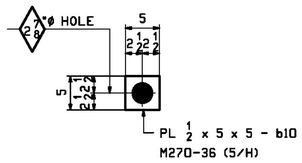

34 - PLATE WASHERS ~ b10

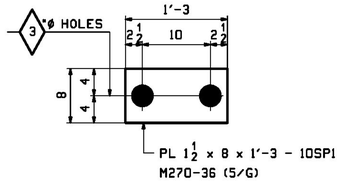

8 - SOLE PLATES ~ 10SP1

ABM INFO		SHIP	BILL OF MATERIAL					JOB NO. 645	DRAWING NO. 10	REV. 1
PAGE	LINE	MARK	QTY	MARK	MATERIAL	LENGTH FT	LENGTH INCHES	REMARKS	WT	PROCUREMENT NOTES
		10AB1	17		SWEDGE ANCHOR ROD				74	
5	J		17	a10	2 1/2 ϕ ROD	3	0	TYPE-1 (SWEDGED - A449 20" THRD)	50	
5	H		34	b10	PL 1/2x5	0	5	PLATE WASHER M270-36	4	
5	K		51		2 1/2 ϕ HHN			M291 (DH)	6	
		10SP1	8		SOLE PLATES				51	
5	G		8		PL 1 1/2x8	1	3	SOLE PLATE M270-36	51	

NOTES:
1. FOR GENERAL NOTES SEE DRAWING GN1.
2. "T2" DENOTES MATERIAL SUBJECT TO CHARPY V-NOTCH TESTING.

REV.	DATE	REMARKS	DWN	CHK	APVL	SHOP
1	1/20 2016	APPROVAL COMMENTS	LWD	WJL		
0						

MATERIAL:	SURFACE PREP. & PAINT:	HOLES:	SHOP BOLTS:
AS NOTED	SEE GN1	AS NOTED	NONE

DESCRIPTION: ANCHOR BOLTS & SOLE PLATES

CASCO BAY STEEL STRUCTURES, INC.
1 WALLACE AVE. SOUTH PORTLAND, ME 04106
PHONE (207) 780-6722 FAX. (207) 780-6726
TENSOR 3354

STRUCTURE: TH-2 (RIVER ROAD) BRIDGE #10 COUNTY OF ADDISON

DRAWN:	DATE:
LWD	10/23
CHKD: WJL	DATE: 10/27

LOCATION:	TOWN OF NEW HAVEN, VT	JOB NO.	DWG NO.
PROJ NO.	BRF 0183 (1)	645	10
CUSTOMER:	CCS CONSTRUCTORS, INC.		REV. 1

WJL Thu, Jan 21, 2016 02:51:17 PM /users/jobs/3354/10 : Rev1