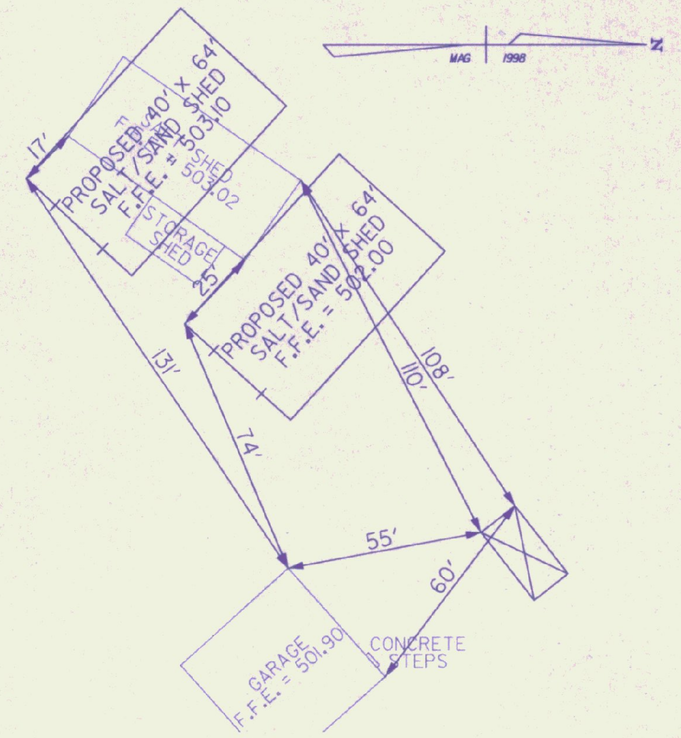


## PROPOSED SAND / SALT SHED POSITIONS

0 30 60
SCALE IN FEET

## LEGEND

CONSTRUCT PAVED DRIVE WITH 12" SUBBASE OF CRUSHED GRAVEL (FINE GRADED) AND PAVE WITH 3" BCP. EXCAVATION FOR THIS AREA SHALL BE PAID AS ITEM 203.15, COMMON EXCAVATION.

REMOVE EXISTING SURFACE REGRADE WITH SUBBASE OF CRUSHED GRAVEL (FINE GRADED) & PAVE WITH 3" BCP.

PAVE WITH 1 1/4" BCP.

***UTILITIES SHOWN ON THESE PLANS ARE APPROXIMATE. THE CONTRACTOR SHALL WORK WITH THE VAOT IN DETERMINING ACTUAL LOCATION OF UTILITIES.***

**FOR REVIEW ONLY**
**NOT FOR CONSTRUCTION**

**PROPERTY LINES**

**PROPERTY LINE INFORMATION WAS OBTAINED FROM A PLAN DATED AUGUST 25, 1987 AND PREPARED BY "DEPARTMENT OF STATE BUILDINGS" TITLED "SEPTIC SYSTEM TUNBRIDGE GARAGE" AS PROVIDED BY THE VERMONT AGENCY OF TRANSPORTATION. PROPERTY LINE INFORMATION IS SHOWN FOR GRAPHICAL PURPOSES ONLY AND SHOULD BE CONSIDERED APPROXIMATE.**

| | |
|---|---|
| PROJECT: TUNBRIDGE SALT SHED | PROJECT NO.: STP SALT(14) |
| DESIGN FILE NAME: 98262BDR.DGN | |
| IPARM FILE NAME: | PLOT DATE: 26 MAR 1999 |
| SURVEYED BY: CLD CONSULTING ENGINEERS | SURVEY DATE: 10/98 |
| SQUAD LEADER: J. WARNER | DRAWN BY: P. HOLT |
| | SHEET: SD-2 |