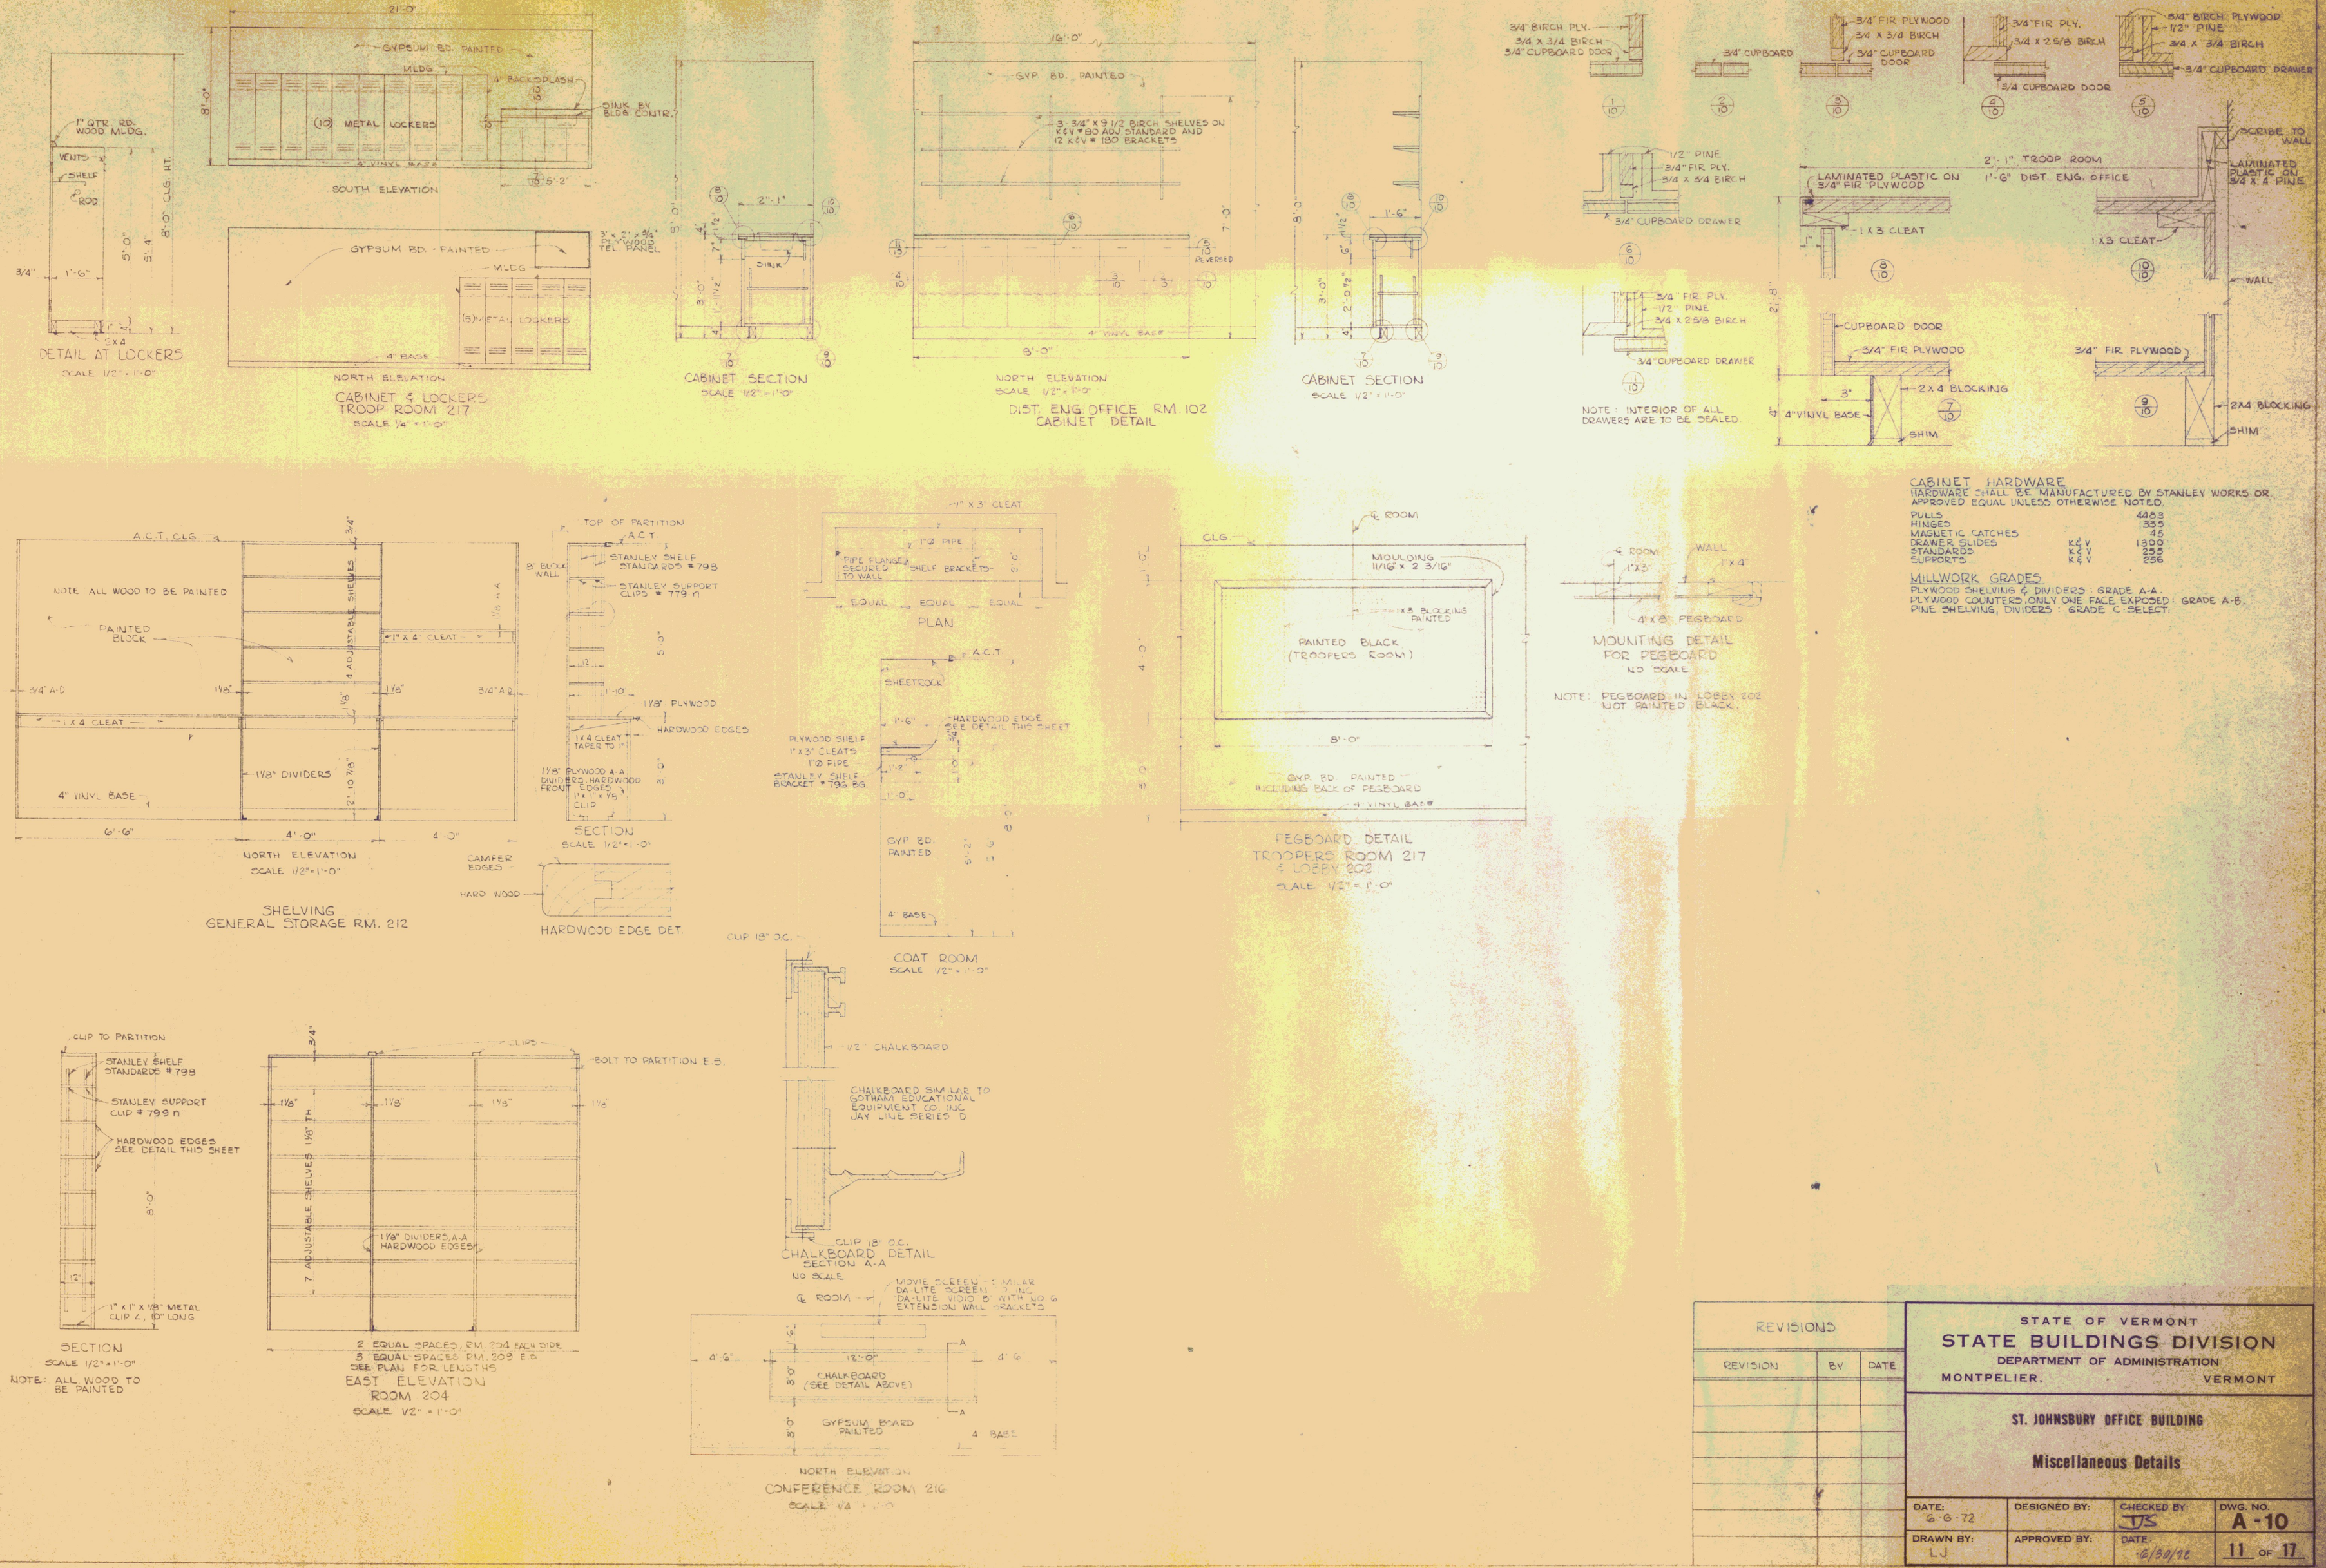

CABINET HARDWARE

HARDWARE SHALL BE MANUFACTURED BY STANLEY WORKS OR APPROVED EQUAL UNLESS OTHERWISE NOTED.

PULLS		4453
HINGES		335
MAGNETIC CATCHES		45
DRAWER SLIDES	K & V	1300
STANDARDS	K & V	255
SUPPORTS	K & V	256

MILLWORK GRADES

PLYWOOD SHELVING & DIVIDERS : GRADE A-A
PLYWOOD COUNTERS, ONLY ONE FACE EXPOSED : GRADE A-B.
PINE SHELVING, DIVIDERS : GRADE C-SELECT.

REVISIONS

REVISION	BY	DATE

STATE OF VERMONT
STATE BUILDINGS DIVISION
DEPARTMENT OF ADMINISTRATION
MONTPELIER, VERMONT

ST. JOHNSBURY OFFICE BUILDING

Miscellaneous Details

DATE: 6-6-72	DESIGNED BY:	CHECKED BY: JJS	DWG. NO. A-10
DRAWN BY: LJ	APPROVED BY:	DATE: 6/30/72	11 OF 17