

REMOVAL OF EXISTING SURFACES
ALL EXISTING PAVEMENT AND COLD PLANE GRINDINGS SURFACES SHALL BE REMOVED PRIOR TO GRADING OF THE SITE. IT IS EXPECTED THAT THE CONTRACTOR WILL FIND VARYING DEPTHS OF COLD PLANE GRINDINGS OF APPROXIMATELY 12" IN DEPTH. REMOVAL OF THESE ITEMS WILL BE PAID AS ITEM 203.28, EXCAVATION OF SURFACES AND PAVEMENTS.

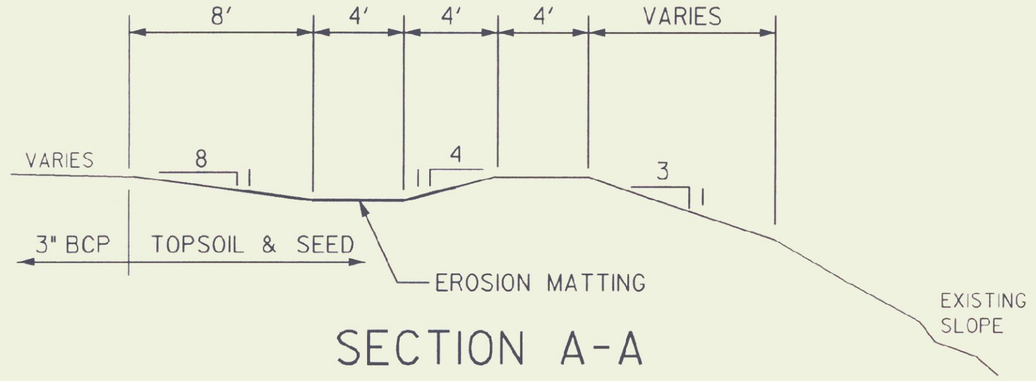

SECTION A-A
N.T.S.

PROJECT: ST. JOHNSBURY SALT SHED	PROJECT NO.: STP SALT (4)S
DESIGN FILE NAME: 98211BDR.DGN	
IPARM FILE NAME:	PLOT DATE: 13 AUG 98
SURVEYED BY: CLD ENGINEERS	SURVEY DATE: 7/98
SQUAD LEADER: J. WARNER	DRAWN BY: T. LUTHER
	SHEET: OF

AUG 13 1998