MAJOR QUANTITY ITEMS

1.	COMMON EXCAVATION	1700 CY
2.	SUBBASE OF GRAVEL (IN PLACE)	2025 CY
3.	CRUSHED GRAVEL (IN PLACE)	200 CY
4.	STAMAT (IN PLACE)	215 TN
5.	FILTER FABRIC	6000 SY
6.	MOUND SAND (IN PLACE)	350 CY
7.	LEACHFIELD & UNDERDRAIN STONE	115 CY
8.	1½" SCHEDULE 40 PVC LEACH LINE	50 LF
9.	2" SCHEDULE 40 PVC FORCE MAIN	50 LF
10.	4" UNDERDRAIN	530 LF
11.	6" UNDERDRAIN	260 LF
12.	6" CARRIER PIPE	220 LF
13.	WOOD POSTS	13
14.	1000 GALLON SEPTIC TANK	1
15.	REINF. CONCRETE PUMP STATION	1
16.	MISCELLANEOUS	SEE PLANS

FINAL SURVEY — SURVEYED, PLOTTED, TEMPLATE, AREAS, AREAS CHECKED — NOTE BOOK — NO. — BY — DATE

ORIGINAL SURVEY — SURVEYED, PLOTTED, TEMPLATE, AREAS, AREAS CHECKED — NOTE BOOK — NO. — BY — DATE

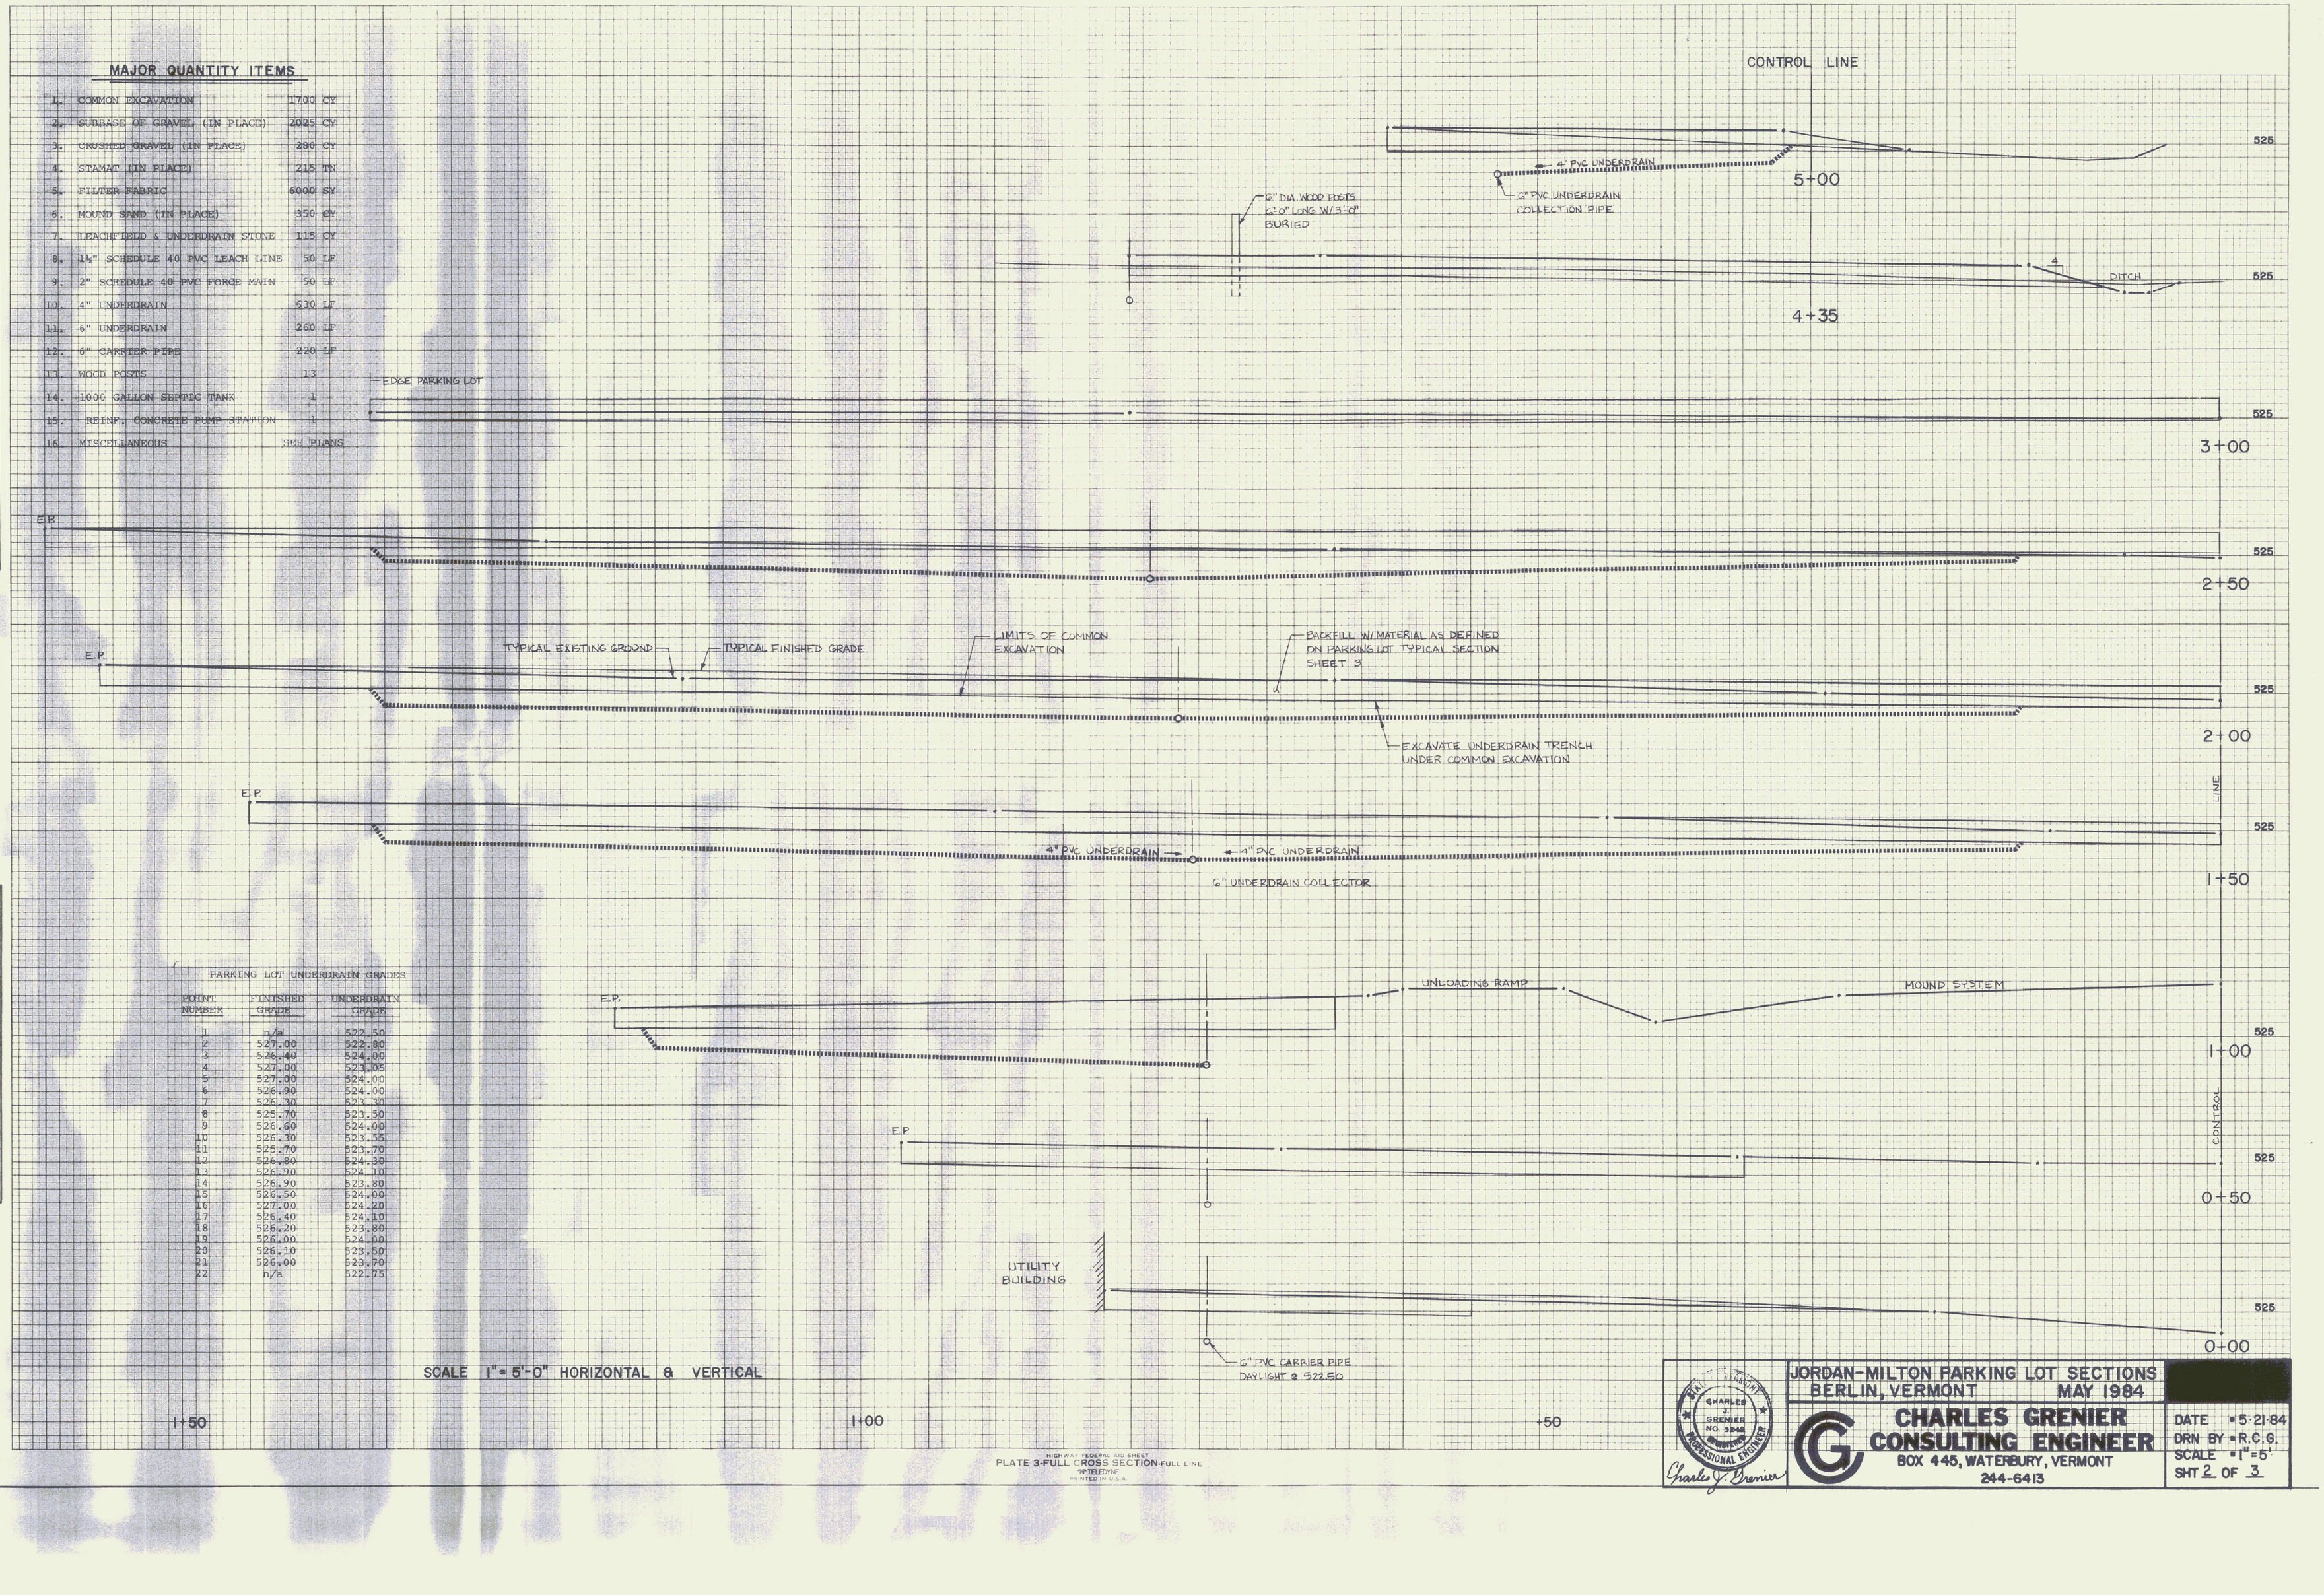

PARKING LOT UNDERDRAIN GRADES

POINT NUMBER	FINISHED GRADE	UNDERDRAIN GRADE
1	n/a	522.50
2	527.00	522.80
3	526.40	524.00
4	527.00	523.05
5	527.00	524.00
6	526.90	524.00
7	526.30	523.30
8	525.70	523.50
9	526.60	524.00
10	526.30	523.55
11	525.70	523.70
12	526.80	524.30
13	526.90	524.10
14	526.90	523.80
15	526.50	524.00
16	527.00	524.20
17	526.40	524.10
18	526.20	523.80
19	526.00	524.00
20	526.10	523.50
21	526.00	523.70
22	n/a	522.75

SCALE 1"= 5'-0" HORIZONTAL & VERTICAL

HIGHWAY FEDERAL AID SHEET
PLATE 3-FULL CROSS SECTION-FULL LINE
TELEDYNE
PRINTED IN U.S.A.

STATE OF VERMONT — CHARLES J. GRENIER NO. 5245 — REGISTERED PROFESSIONAL ENGINEER
Charles J. Grenier

JORDAN-MILTON PARKING LOT SECTIONS
BERLIN, VERMONT MAY 1984

CHARLES GRENIER CONSULTING ENGINEER
BOX 445, WATERBURY, VERMONT
244-6413

DATE = 5-21-84
DRN BY = R.C.G.
SCALE = 1"=5'
SHT 2 OF 3